


JOB NAME

ITEM NO.

SUBMITTED AS SHOWN	
SUBMITTED AS NOTED	

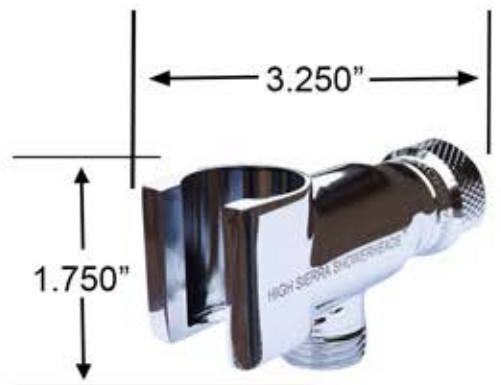

DIMENSIONS IN INCHES

**Specifications**

SPECIFICATION MANUAL

- ① FCS™ Patented Stainless Steel Non-Clogging Nozzle with Ball-Joint Swivel
- ② Max Flow Rate 1.5 gpm from 30-80 psi
- ③ Threads: 1/2"-14 NPT Male
- ④ All Metal Construction; Brass and Stainless Steel; Chrome Plated with Rubber Grip
- ⑤ For Use in Facilities Requiring Handheld with 1/2"-14 NPT Male Threads
- ⑥ ADA Compliant; Certifications: A112.18.1 and WaterSense
- ⑦ Set Screw: 1/16" Hex Stainless Steel
- ⑧ Hose: 6' Brass and Stainless Steel; Chrome Plated with Flexible Tubing
- ⑨ Holder: Solid Brass; Rotating Nut; Threads: 1/2"-14 NPT Female
- ⑩ Compliant with Buy American Act