



SUBMITTED MODEL NO.


FCS-100-VRF1214NS-1.5

JOB NAME

ITEM NO.

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

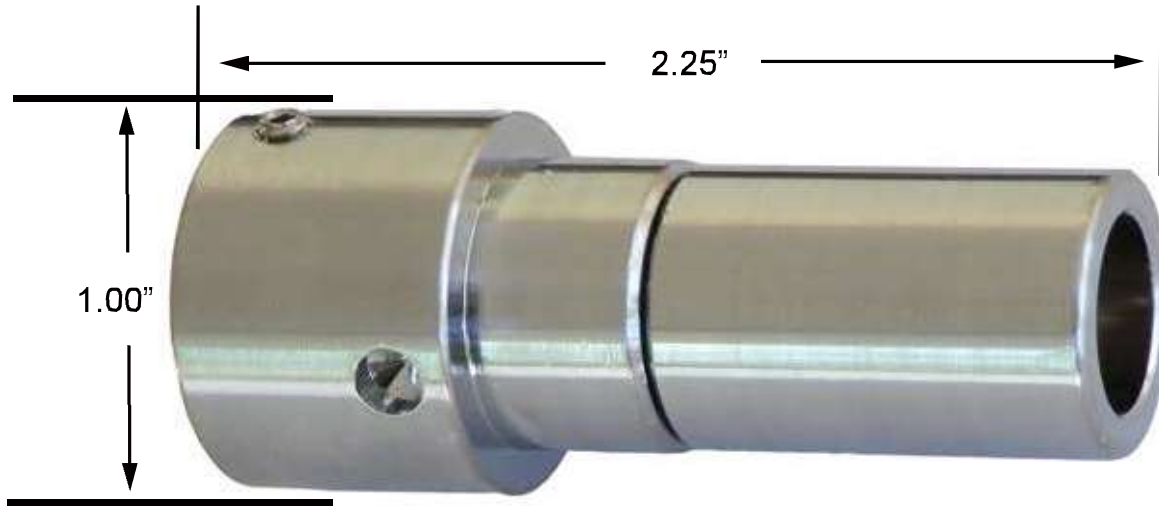

DIMENSIONS IN INCHES

Specifications

SPECIFICATION MANUAL

- ① FCS™ Patented Stainless Steel Non-Clogging Nozzle
- ② Max Flow Rate 1.5 gpm from 30-80 psi
- ③ Threads: 1/2"-14 NPS Female
- ④ All Metal Construction; Brass and Stainless Steel; Chrome Plated
- ⑤ For use with Shower Fixtures Requiring 1/2" NPS Female Threads
- ⑥ Maximum Vandal Resistant: Non-Swivel, round body w/out knurl, cone-pointed set screws
- ⑦ Set Screws: 1/16" Hex Stainless Steel
- ⑧ Installation: Use 3/16" Spanner Wrench

This document was created with Win2PDF available at <http://www.win2pdf.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.
This page will not be added after purchasing Win2PDF.