


JOB NAME	ITEM NO.
----------	----------

SUBMITTED AS SHOWN	
SUBMITTED AS NOTED	

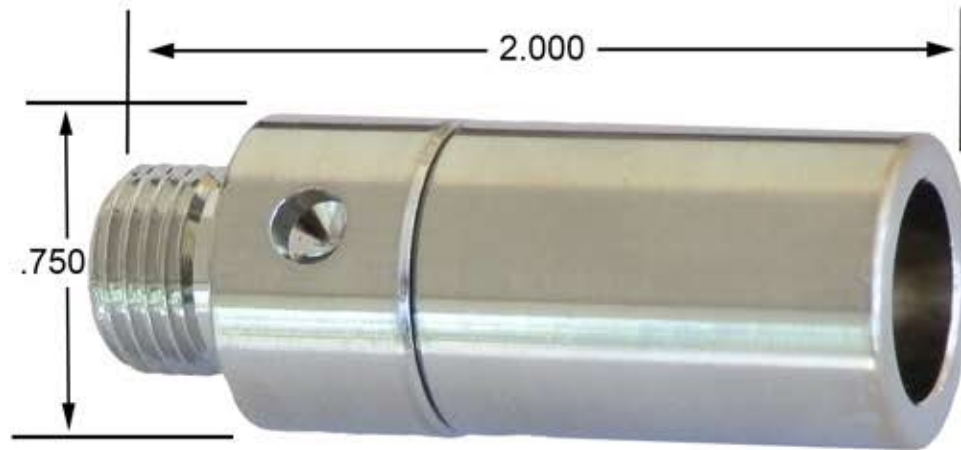

DIMENSIONS IN INCHES

Specifications	SPECIFICATION MANUAL
<ul style="list-style-type: none"> ① FCS™ Patented Stainless Steel Non-Clogging Nozzle ② Max Flow Rate 1.8 gpm from 30-80 psi ③ Threads: 1/2"-20 Male ④ All Metal Construction; Brass and Stainless Steel; Double Nickel Plated ⑤ For Use in Willoughby WSH-5 and Other Shower Fixtures Requiring 1/2"-20 Male Threads ⑥ Vandal and Ligature Resistant ⑦ Certifications: A112.18.1 and WaterSense ⑧ Installation: Use 3/16" Spanner Wrench 	