


ITEM NAME

Classic™ Fixed Shower Head

CHROME FINISH

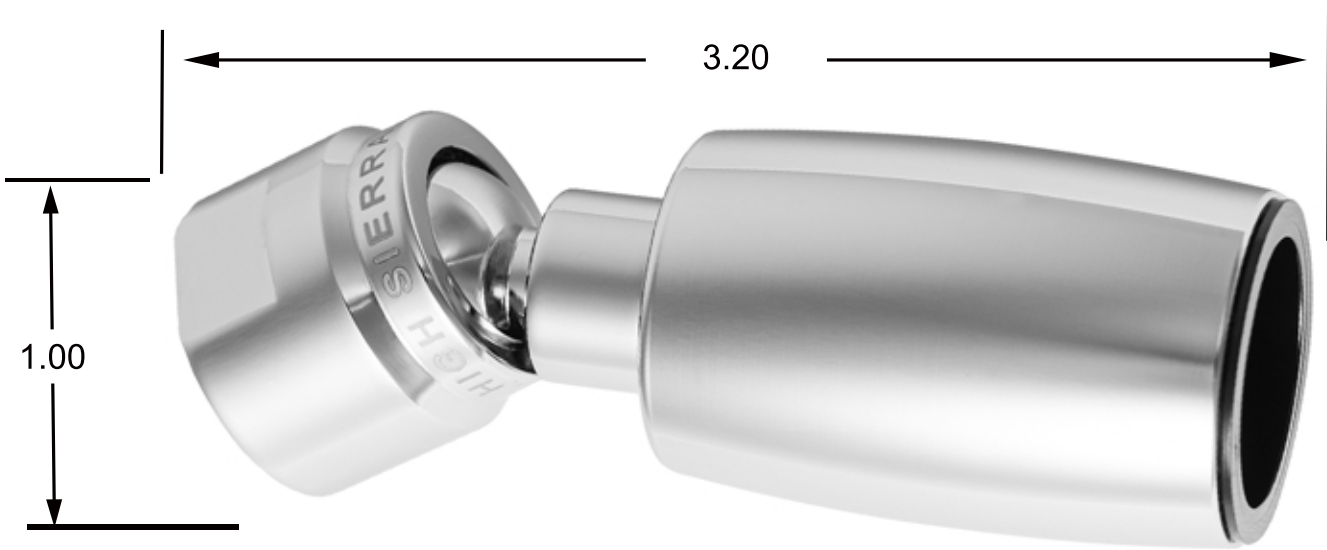

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES


- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle.
- ② Non-Clogging Silicone Flow Control Diaphragm 1.25 GPM at 30-80 psi (Pressure Compensating).
- ③ Threads: 1/2"-14NPS Female.
- ④ Solid Metal Construction; Lead Free Brass and Stainless Steel; Wt: .25 lbs. Chrome Plated. Fully drains after each use. Naturally antibacterial.
- ⑤ Connects to 45° Shower Arms with 1/2" NPS Male Threads.
- ⑥ Ball-Joint Swivel.
- ⑦ Certifications: A112.18.1, and WaterSense.
- ⑧ Compliant with Buy American Act. U.S. Patent 7,185,830 B2 and Patent Pending.

Includes limescale resistance insert. Insert protects metal from limescale build-up, corrosion, and makes cleaning the shower head easier

ITEM NAME

Classic™ Fixed Shower Head

CHROME FINISH

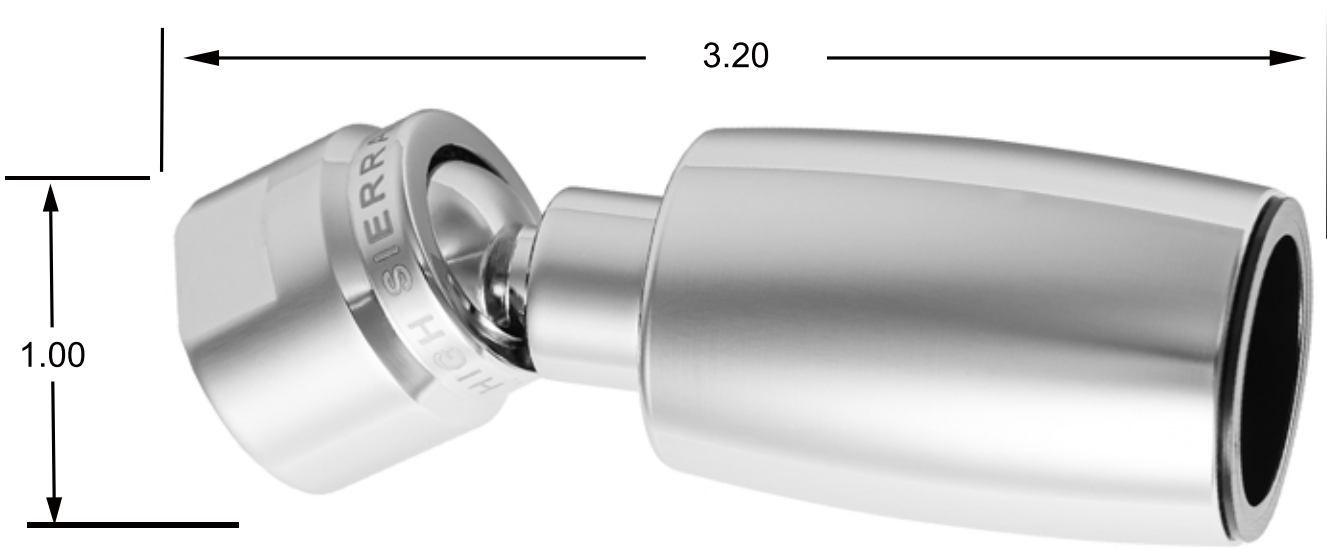

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES


- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle.
- ② Non-Clogging Silicone Flow Control Diaphragm 1.5 GPM at 30-80 psi (Pressure Compensating).
- ③ Threads: 1/2"-14NPS Female.
- ④ Solid Metal Construction; Lead Free Brass and Stainless Steel; Wt: .25 lbs. Chrome Plated. Fully drains after each use. Naturally antibacterial.
- ⑤ Connects to 45° Shower Arms with 1/2" NPS Male Threads.
- ⑥ Ball-Joint Swivel.
- ⑦ Certifications: A112.18.1, WaterSense, and WaterMark.
- ⑧ Compliant with Buy American Act. U.S. Patent 7,185,830 B2 and Patent Pending.

Includes limescale resistance insert. Insert protects metal from limescale build-up, corrosion, and makes cleaning the shower head easier

ITEM NAME

Classic™ Fixed Shower Head

CHROME FINISH

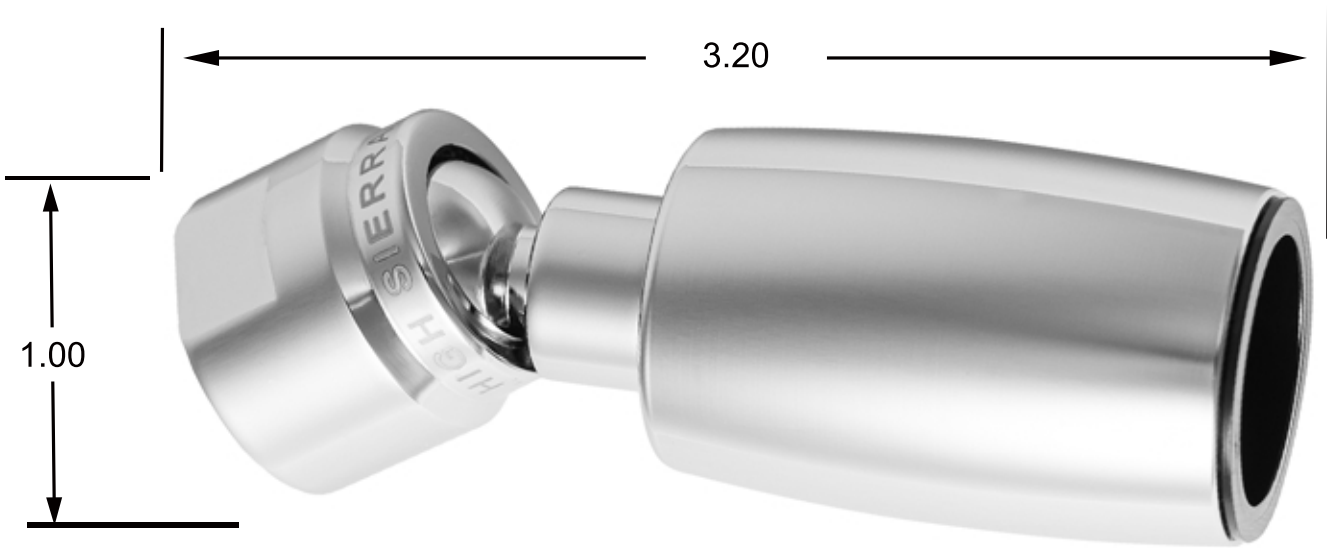

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle.
- ② Non-Clogging Silicone Flow Control Diaphragm 1.8 GPM at 30-80 psi (Pressure Compensating).
- ③ Threads: 1/2"-14NPS Female.
- ④ Solid Metal Construction; Lead Free Brass and Stainless Steel; Wt: .25 lbs. Chrome Plated. Fully drains after each use. Naturally antibacterial.
- ⑤ Connects to 45° Shower Arms with 1/2" NPS Male Threads.
- ⑥ Ball-Joint Swivel.
- ⑦ Certifications: A112.18.1, and WaterSense.
- ⑧ Compliant with Buy American Act. U.S. Patent 7,185,830 B2 and Patent Pending.

Includes limescale resistance insert. Insert protects metal from limescale build-up, corrosion, and makes cleaning the shower head easier