

SUBMITTED MODEL NO.


FCS-100-N-1.25

BRUSHED NICKEL FINISH

JOB NAME ITEM Classic™ Fixed Shower Head

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

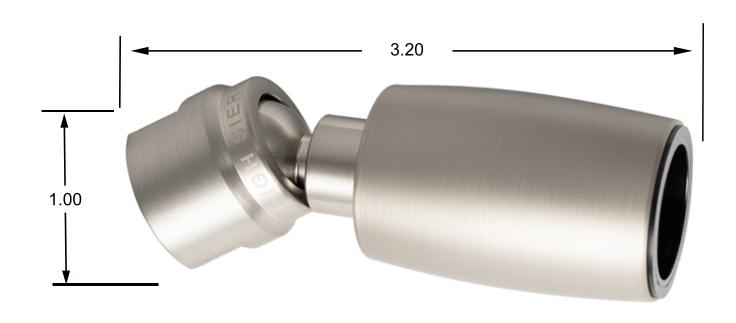

*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel.	Includes limescale resistance insert. Insert protects metal from limescale buildup, corrosion, and makes cleaning the shower head easier.
② Non-Clogging Silicone Flow Control Diaphragm 1.25 GPM at 30-80 psi (Pressure Compensating).	
③ Threads: 1/2"-14NPS Female.	
Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Brushed Nickel Plated. Wt: .25 lbs.	
(5) Connects to 45° Shower Arms with 1/2" NPS Male Threads.	
6 Certifications: A112.18.1, and WaterSense.	
⑦ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	