

SUBMITTED MODEL NO.

FCS-100-VRF1214NS-1.25

CHROME FINISH


JOB NAME

ITEM

Retrofits Standard Shower Heads
with 1/2-14 NPS Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

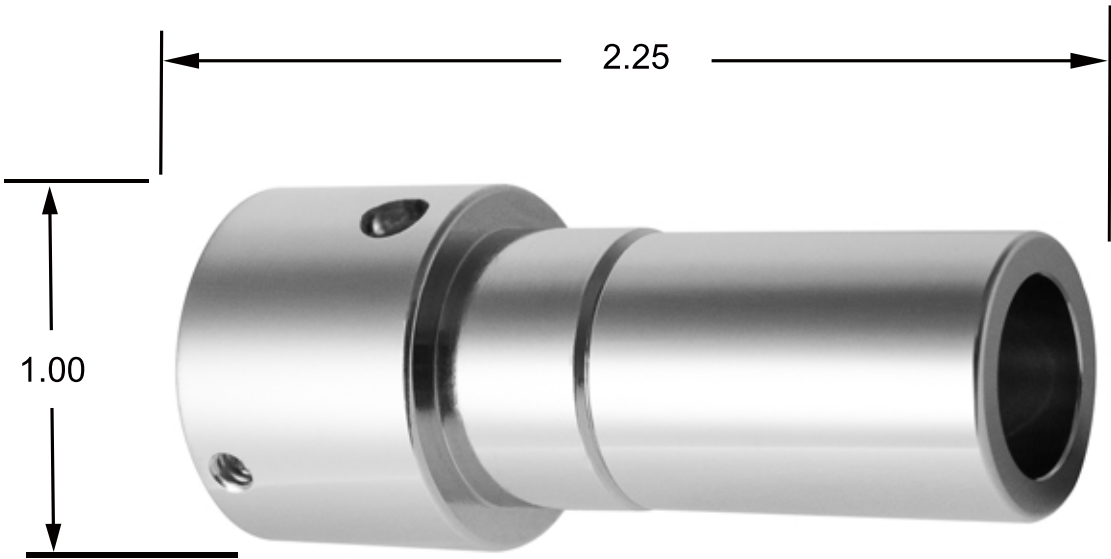

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body.
- ② Non-Clogging Silicone Flow Control Diaphragm 1.25 GPM at 30-80 psi. Pressure Compensating.
- ③ Threads: 1/2"-14 NPS Female.
- ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs.
- ⑤ Connects to Shower Arms with 1/2" NPS Male Threads.
- ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel.
- ⑦ Certifications: A112.18.1, and WaterSense. California Compliant.
- ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use
Spanner Wrench
with 3/16" pin.

SUBMITTED MODEL NO.

FCS-100-VRF1214NS-1.5

CHROME FINISH


JOB NAME

ITEM

Retrofits Standard Shower Heads
with 1/2-14 NPS Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

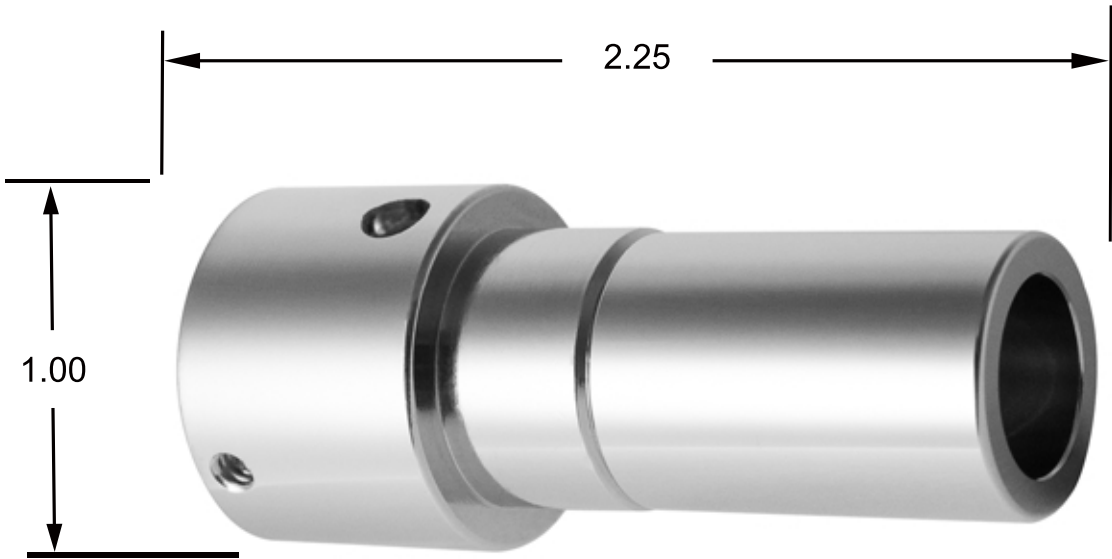

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES


- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body.
- ② Non-Clogging Silicone Flow Control Diaphragm 1.5 GPM at 30-80 psi. Pressure Compensating.
- ③ Threads: 1/2"-14 NPS Female.
- ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs.
- ⑤ Connects to Shower Arms with 1/2" NPS Male Threads.
- ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel.
- ⑦ Certifications: A112.18.1, WaterSense, and WaterMark. California Compliant.
- ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use
Spanner Wrench
with 3/16" pin.

SUBMITTED MODEL NO.
FCS-100-VRF1214NS-1.8
CHROME FINISH

JOB NAME	ITEM	Retrofits Standard Shower Heads with 1/2-14 NPS Male Threads
----------	------	--

SUBMITTED AS SHOWN	
SUBMITTED AS NOTED	

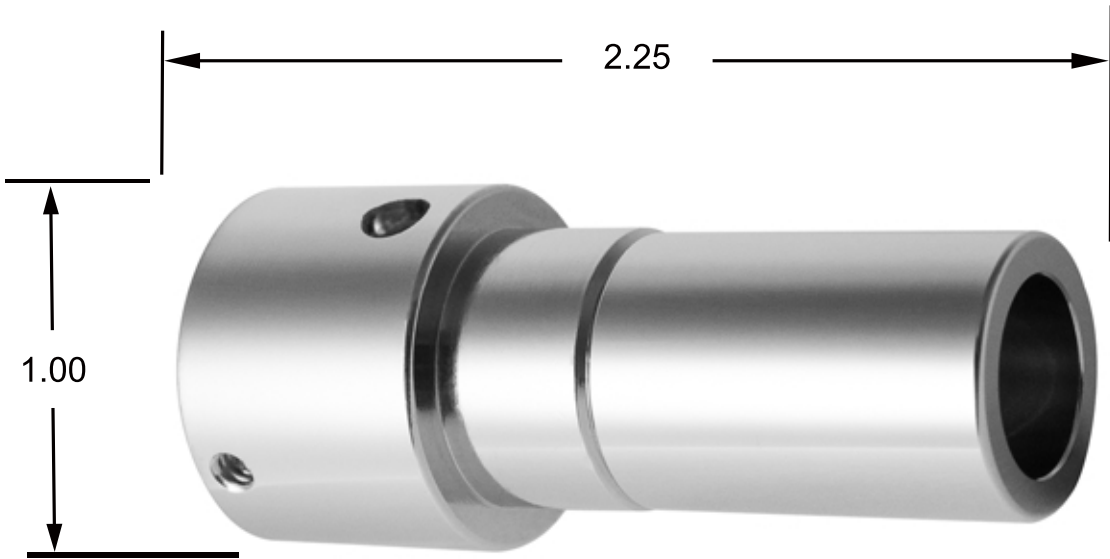

*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body. ② Non-Clogging Silicone Flow Control Diaphragm 1.8 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 1/2"-14 NPS Female. ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs. ⑤ Connects to Shower Arms with 1/2" NPS Male Threads. ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel. ⑦ Certifications: A112.18.1, and WaterSense. California Compliant. ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Installation: Use Spanner Wrench with 3/16" pin.

SUBMITTED MODEL NO.

FCS-100-VRF1214NS-2.0

CHROME FINISH


JOB NAME

ITEM

Retrofits Standard Shower Heads
with 1/2-14 NPS Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

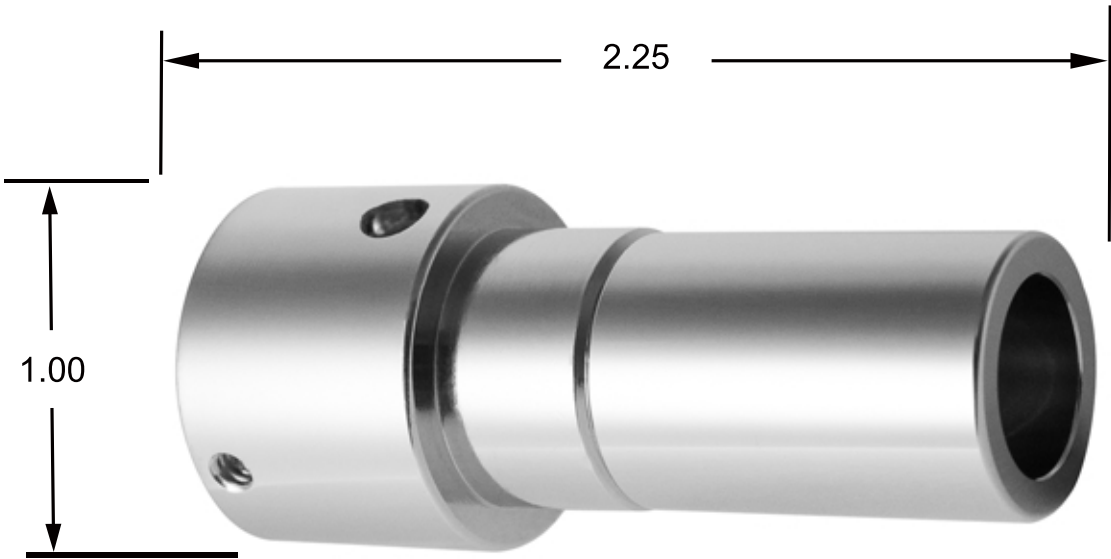

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body.
- ② Non-Clogging Silicone Flow Control Diaphragm 2.0 GPM at 30-80 psi. Pressure Compensating.
- ③ Threads: 1/2"-14 NPS Female.
- ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs.
- ⑤ Connects to Shower Arms with 1/2" NPS Male Threads.
- ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel.
- ⑦ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use
Spanner Wrench
with 3/16" pin.