

FCS-100-VRM1214-MC-1.25

CHROME FINISH


JOB NAME

ITEM

Retrofits Metcraft Models with 1/2-14 NPS Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

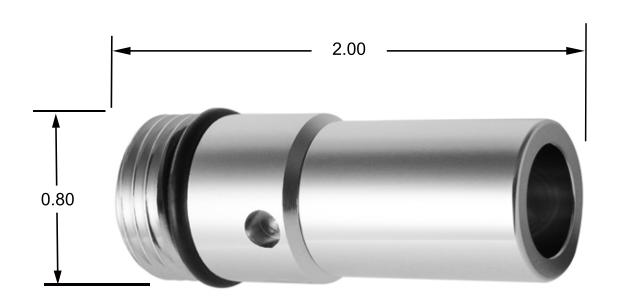

*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
 FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body. Non-Clogging Silicone Flow Control Diaphragm 1.25 GPM at 30-80 psi. Pressure Compensating. Threads: 1/2"-14 NPS Male. 	Installation: Use Spanner Wrench with 3/16" pin.
All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs.	
5 For use in Metcraft and other wall receivers with 1/2" NPS female threads.	
Vandal and Ligature Resistant.	
7 Certifications: A112.18.1, and WaterSense. California Compliant.	

(8) Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.



FCS-100-VRM1214-MC-1.5

CHROME FINISH


JOB NAME

Retrofits Metcraft Models with 1/2-14 NPS Male Threads

ITEM

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

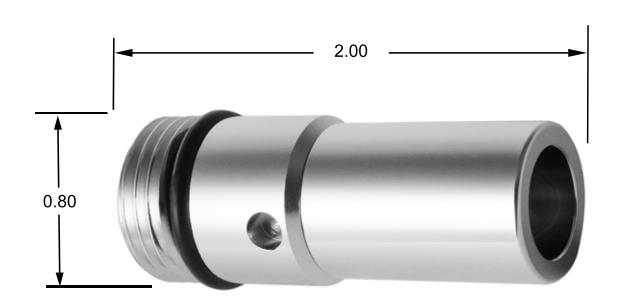

*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
 FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body. Non-Clogging Silicone Flow Control Diaphragm 1.5 GPM at 30-80 psi. Pressure Compensating. Threads: 1/2"-14 NPS Male. 	Installation: Use Spanner Wrench with 3/16" pin.
All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs.	
5 For use in Metcraft and other wall receivers with 1/2" NPS female threads.	
Vandal and Ligature Resistant.	
Oertifications: A112.18.1, WaterSense, and WaterMark. California Compliant.	

(8) Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.



FCS-100-VRM1214-MC-1.8


CHROME FINISH

JOB NAME ITEM

Retrofits Metcraft Models with 1/2-14 NPS Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

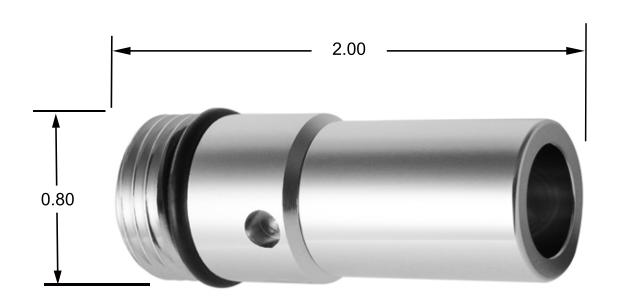

*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
 FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body. Non-Clogging Silicone Flow Control Diaphragm 1.8 GPM at 30-80 psi. Pressure Compensating. Threads: 1/2"-14 NPS Male. 	Installation: Use Spanner Wrench with 3/16" pin.
4 All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs.	
5 For use in Metcraft and other wall receivers with 1/2" NPS female threads.	
Vandal and Ligature Resistant.	
7 Certifications: A112.18.1, and WaterSense. California Compliant.	

(8) Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.



FCS-100-VRM1214-MC-2.0


CHROME FINISH

JOB NAME

ITEM

Retrofits Metcraft Models with 1/2-14 NPS Male Threads

SUBMITTED AS SHOWN
SUBMITTED AS NOTED

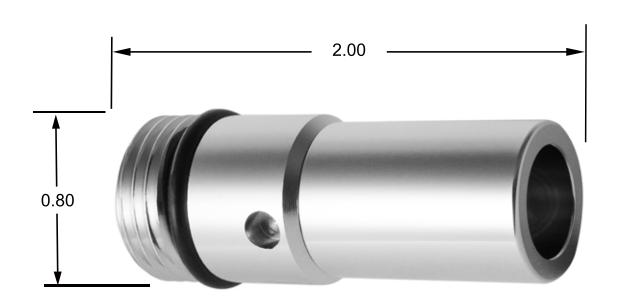

*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
 FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body. Non-Clogging Silicone Flow Control Diaphragm 2.0 GPM at 30-80 psi. Pressure Compensating. 	Installation: Use Spanner Wrench with 3/16" pin.
 Threads: 1/2"-14 NPS Male. All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs. 	
5 For use in Metcraft and other wall receivers with 1/2" NPS female threads.	
Vandal and Ligature Resistant.	
(7) Compliant with Buy American Act (BAA), U.S. Patent 7,185,830,B2 and Patent Pending	