

SUBMIT	TED MO	DEL NO
--------	--------	--------

FCS-200-CH-1.25


CHROME FINISH

JOB NAME I

ITEM

Classic™ Fixed Shower Head w/ Trickle Valve

SUBMITTED AS SHOWN
SUBMITTED AS NOTED

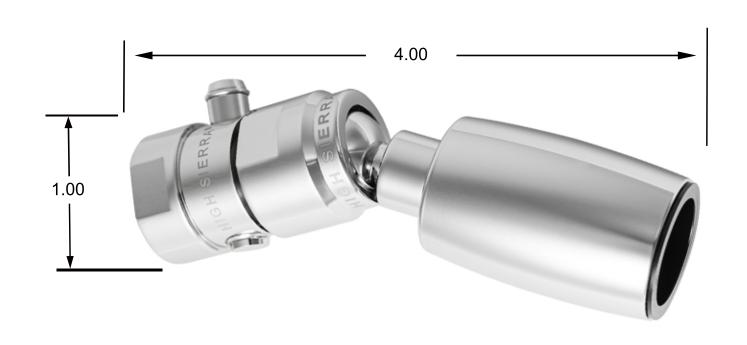

*DIMENSIONS IN INCHES

NOTES SPECIFICATIONS FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel. Includes limescale resistance insert. (2) Non-Clogging Silicone Flow Control Diaphragm 1.25 GPM at 30-80 psi (Pressure Compensating). Insert protects metal from limescale Threads: 1/2"-14NPS Female. buildup, corrosion, (4) Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. and makes cleaning Naturally Antibacterial. Chrome Plated. Wt: .43 lbs. the shower head easier. (5) Connects to 45° Shower Arms With 1/2" NPS Male Threads. (6) Push Button Trickle Valve (Navy Showers). (7) Certifications: A112.18.1, and WaterSense.

(8) Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.