


JOB NAME

ITEM

Retrofits Bradley Models
w/ 1/2 - 14 NPS Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

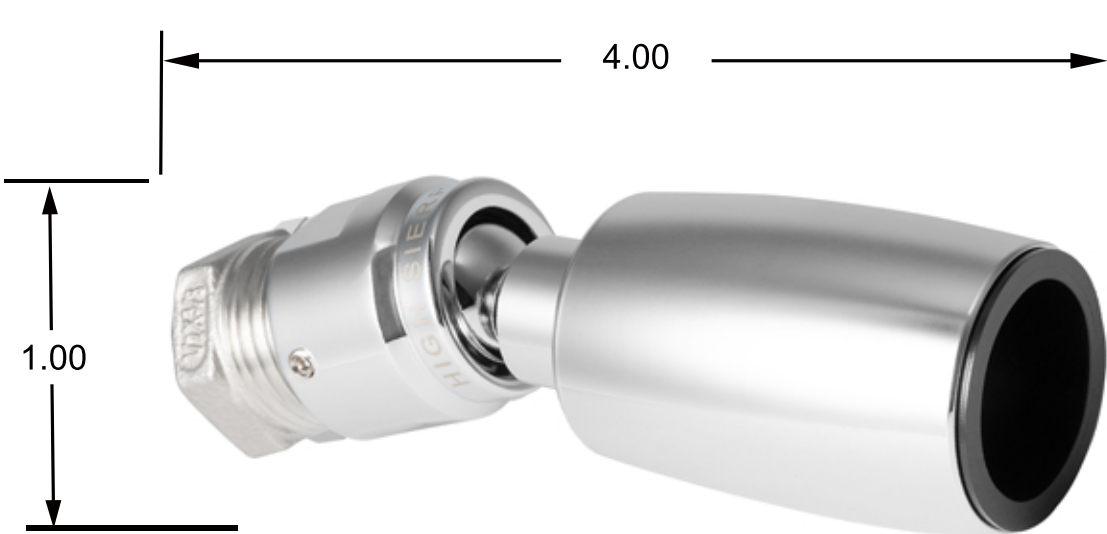

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ①

FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel.
- ②

Non-Clogging Silicone Flow Control Diaphragm 1.25 GPM at 30-80 psi. Pressure Compensating.
- ③

Threads: 3/8"-18 NPT Female.
- ④

Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .30 lbs.
- ⑤

Connects to Wall Mounted Receivers with 3/8" NPT Male Threads.
- ⑥

Vandal Resistant Set Screws: 1/16" Hex Stainless Steel.
- ⑦

Certifications: A112.18.1, and WaterSense. California Compliant.
- ⑧

Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Includes limescale resistance insert. Insert protects metal from limescale buildup, corrosion, and makes cleaning the shower head easier.


JOB NAME

ITEM

Retrofits Bradley Models
w/ 1/2 - 14 NPS Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

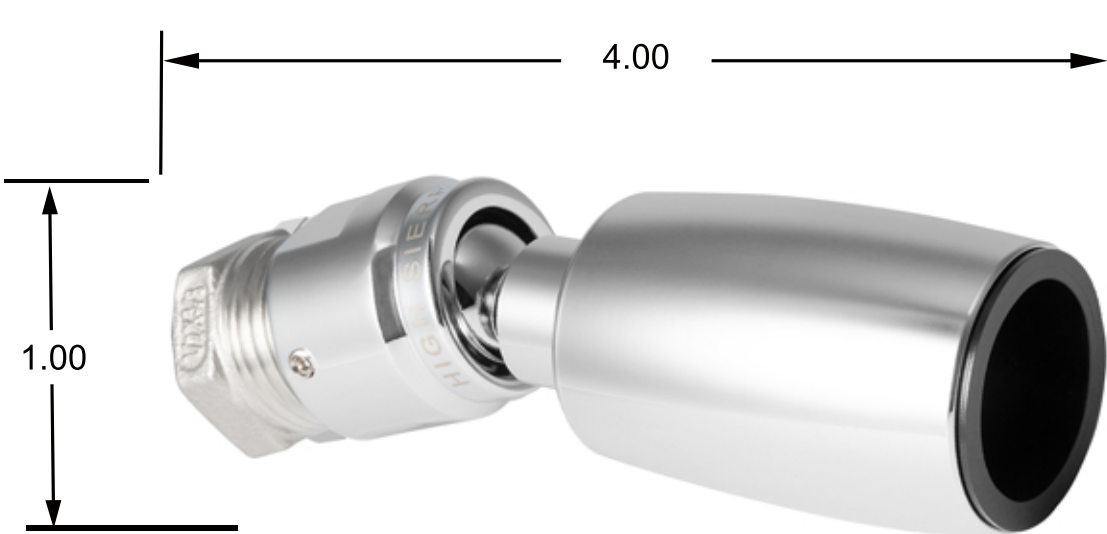

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ①

FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel.
- ②

Non-Clogging Silicone Flow Control Diaphragm 1.5 GPM at 30-80 psi. Pressure Compensating.
- ③

Threads: 3/8"-18 NPT Female.
- ④

Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .30 lbs.
- ⑤

Connects to Wall Mounted Receivers with 3/8" NPT Male Threads.
- ⑥

Vandal Resistant Set Screws: 1/16" Hex Stainless Steel.
- ⑦

Certifications: A112.18.1, WaterSense, and WaterMark. California Compliant.
- ⑧


Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Includes limescale resistance insert. Insert protects metal from limescale buildup, corrosion, and makes cleaning the shower head easier.

SUBMITTED MODEL NO.
FCS-100-VRF3818-1.8
CHROME FINISH

JOB NAME	ITEM	Retrofits Bradley Models w/ 1/2 - 14 NPS Male Threads
----------	------	--

SUBMITTED AS SHOWN	
SUBMITTED AS NOTED	

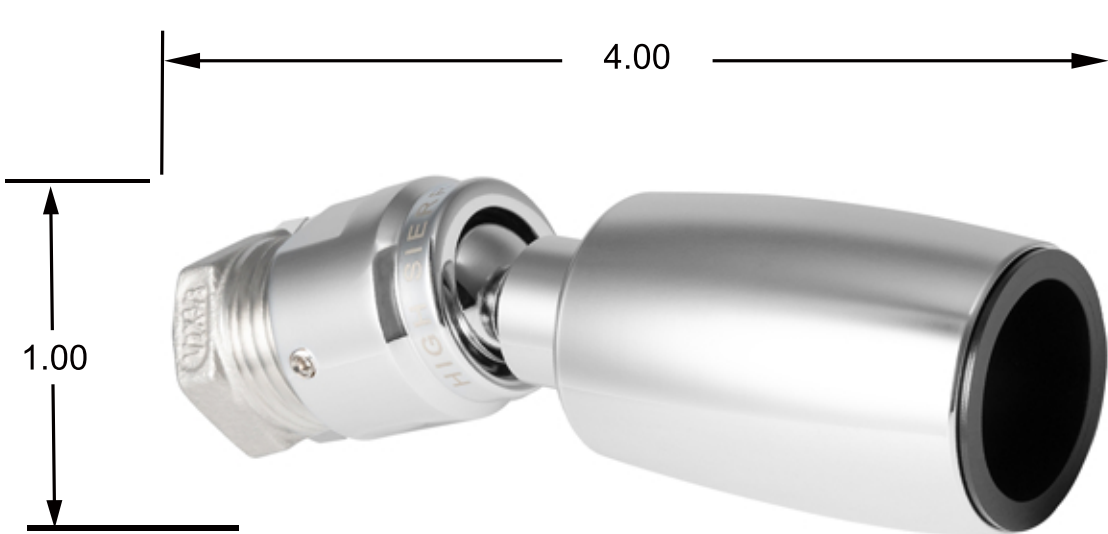

*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel. ② Non-Clogging Silicone Flow Control Diaphragm 1.8 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 3/8"-18 NPT Female. ④ Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .30 lbs. ⑤ Connects to Wall Mounted Receivers with 3/8" NPT Male Threads. ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel. ⑦ Certifications: A112.18.1, and WaterSense. California Compliant. ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Includes limescale resistance insert. Insert protects metal from limescale buildup, corrosion, and makes cleaning the shower head easier.


JOB NAME

ITEM

Retrofits Bradley Models
w/ 1/2 - 14 NPS Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

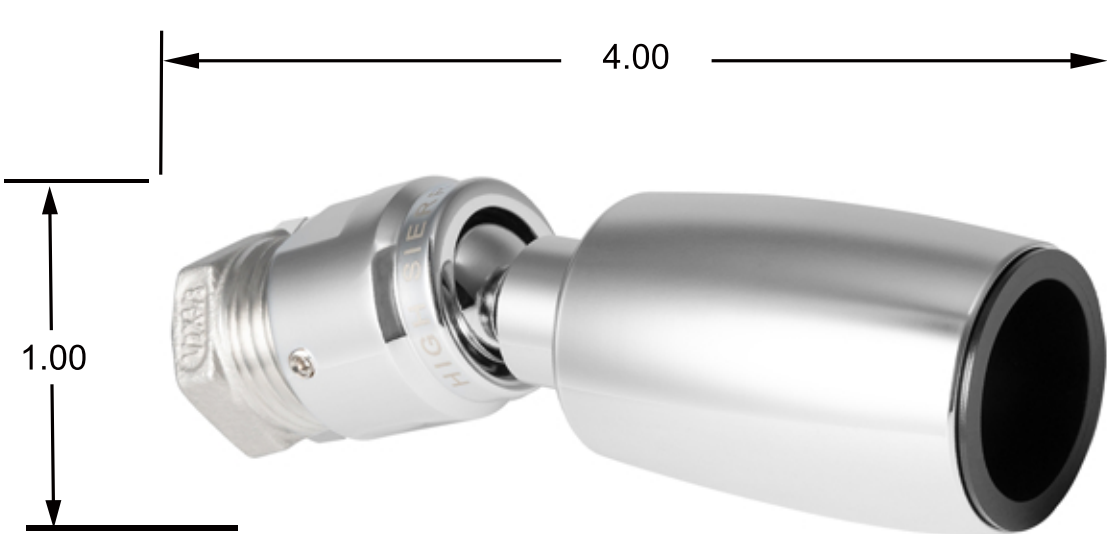

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel.
- ② Non-Clogging Silicone Flow Control Diaphragm 2.0 GPM at 30-80 psi. Pressure Compensating.
- ③ Threads: 3/8"-18 NPT Female.
- ④ Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .30 lbs.
- ⑤ Connects to Wall Mounted Receivers with 3/8" NPT Male Threads.
- ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel.
- ⑦ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Includes limescale resistance insert. Insert protects metal from limescale buildup, corrosion, and makes cleaning the shower head easier.