

SUBMITTED MODEL NO.

FCS-100-VRF3818NS-1.25

CHROME FINISH


JOB NAME

ITEM

Retrofits Bradley Models with
3/8 inch-18 Female Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

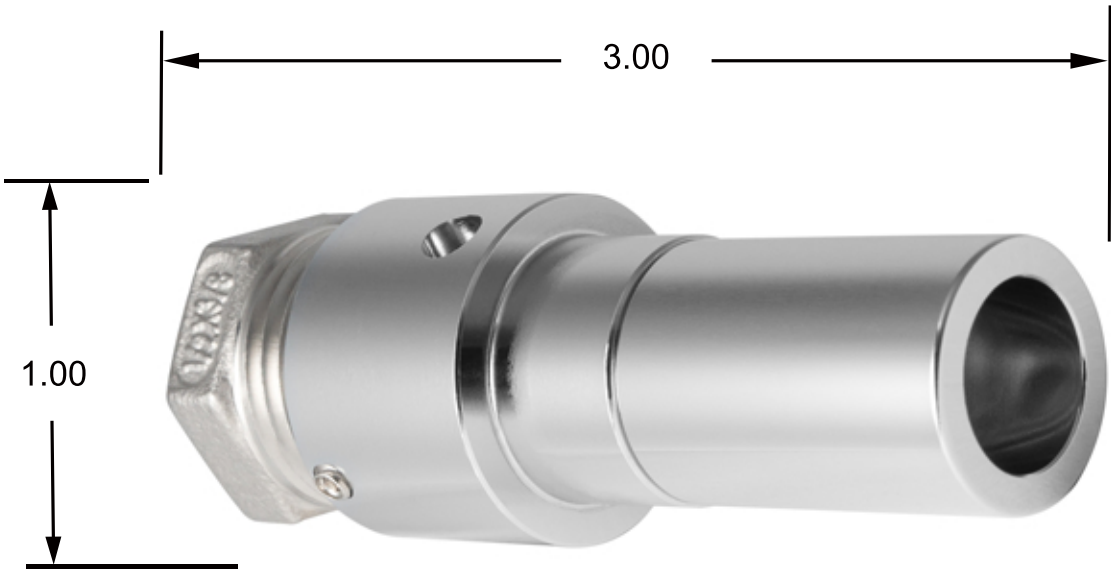

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body.
- ② Non-Clogging Silicone Flow Control Diaphragm 1.25 GPM at 30-80 psi. Pressure Compensating.
- ③ Threads: 3/8"-18 NPT Female.
- ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs.
- ⑤ Connects to Wall Mounted Receivers with 3/8" NPT Male Threads.
- ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel.
- ⑦ Certifications: A112.18.1, and WaterSense. California Compliant.
- ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use
Spanner Wrench
with 3/16" pin.

SUBMITTED MODEL NO.

FCS-100-VRF3818NS-1.5

CHROME FINISH


JOB NAME

ITEM

Retrofits Bradley Models with
3/8 inch-18 Female Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

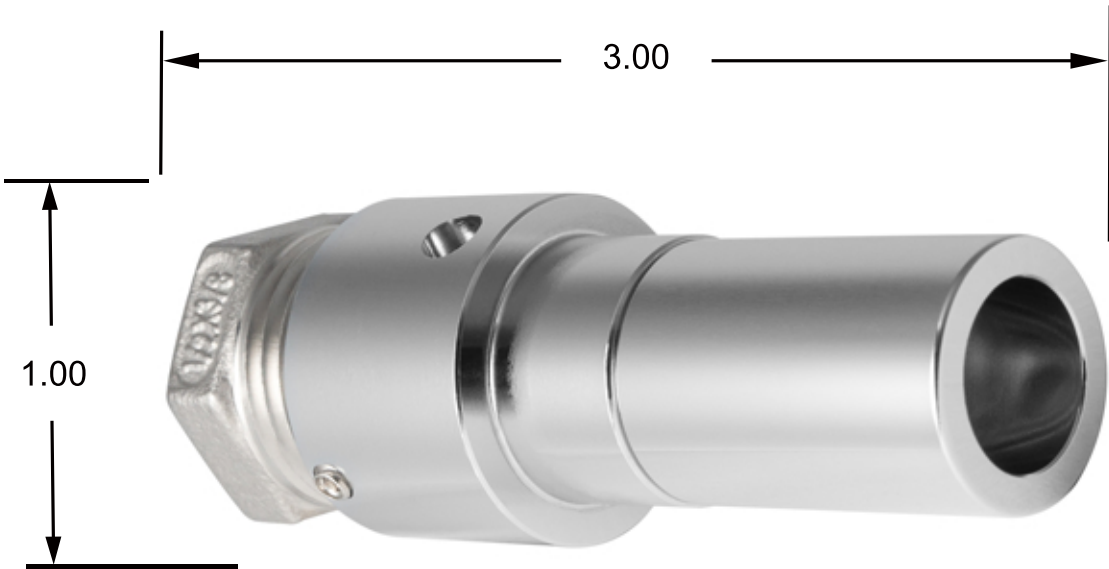

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body.
- ② Non-Clogging Silicone Flow Control Diaphragm 1.5 GPM at 30-80 psi. Pressure Compensating.
- ③ Threads: 3/8"-18 NPT Female.
- ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs.
- ⑤ Connects to Wall Mounted Receivers with 3/8" NPT Male Threads.
- ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel.
- ⑦ Certifications: A112.18.1, WaterSense, and WaterMark. California Compliant.
- ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use
Spanner Wrench
with 3/16" pin.


JOB NAME

ITEM

Retrofits Bradley Models with
3/8 inch-18 Female Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

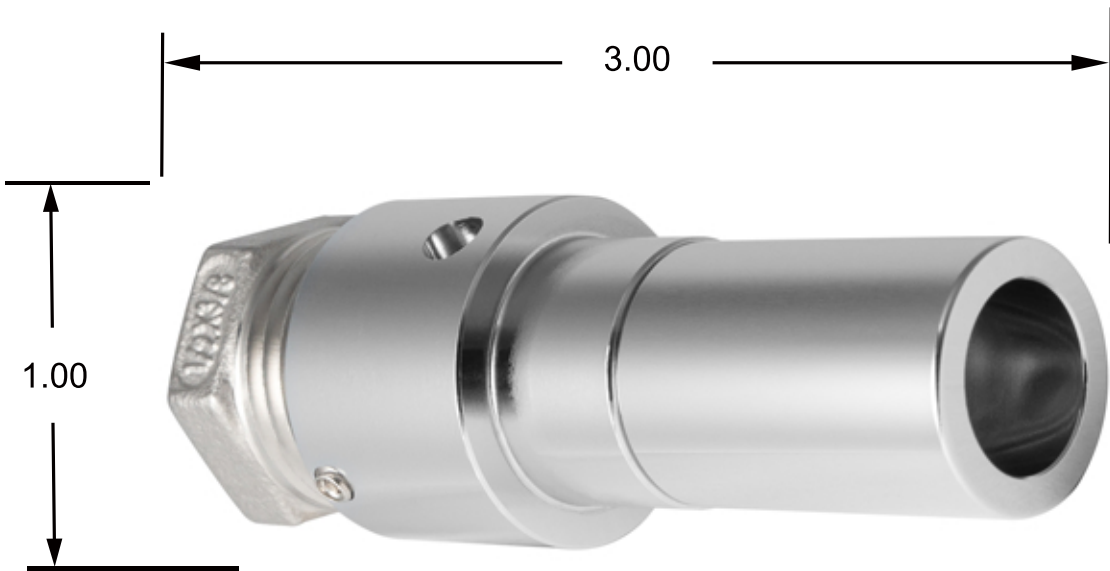

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ①

FCS™Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body.
- ②

Non-Clogging Silicone Flow Control Diaphragm 1.8 GPM at 30-80 psi. Pressure Compensating.
- ③

Threads: 3/8"-18 NPT Female.
- ④

All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs.
- ⑤

Connects to Wall Mounted Receivers with 3/8" NPT Male Threads.
- ⑥

Vandal Resistant Set Screws: 1/16" Hex Stainless Steel.
- ⑦

Certifications: A112.18.1, and WaterSense. California Compliant.
- ⑧


Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use
Spanner Wrench
with 3/16" pin.

SUBMITTED MODEL NO.
FCS-100-VRF3818NS-2.0
CHROME FINISH

JOB NAME	ITEM	Retrofits Bradley Models with 3/8 inch-18 Female Threads
----------	------	--

SUBMITTED AS SHOWN	
SUBMITTED AS NOTED	

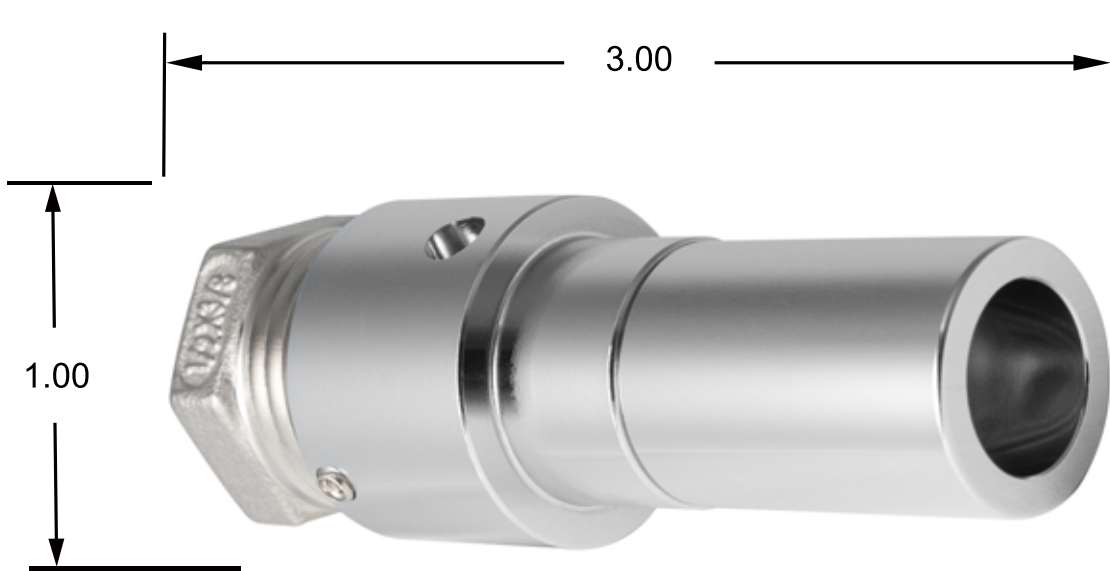

*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body. ② Non-Clogging Silicone Flow Control Diaphragm 2.0 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 3/8"-18 NPT Female. ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs. ⑤ Connects to Wall Mounted Receivers with 3/8" NPT Male Threads. ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel. ⑦ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Installation: Use Spanner Wrench with 3/16" pin.