


SUBMITTED MODEL NO.
FCS-100-VRM1214-1.25
CHROME FINISH

JOB NAME	ITEM	Retrofits All Acorn and Logan Wizard Models w/ 1/2 - 14 NPS Male Threads
SUBMITTED AS SHOWN		
SUBMITTED AS NOTED		

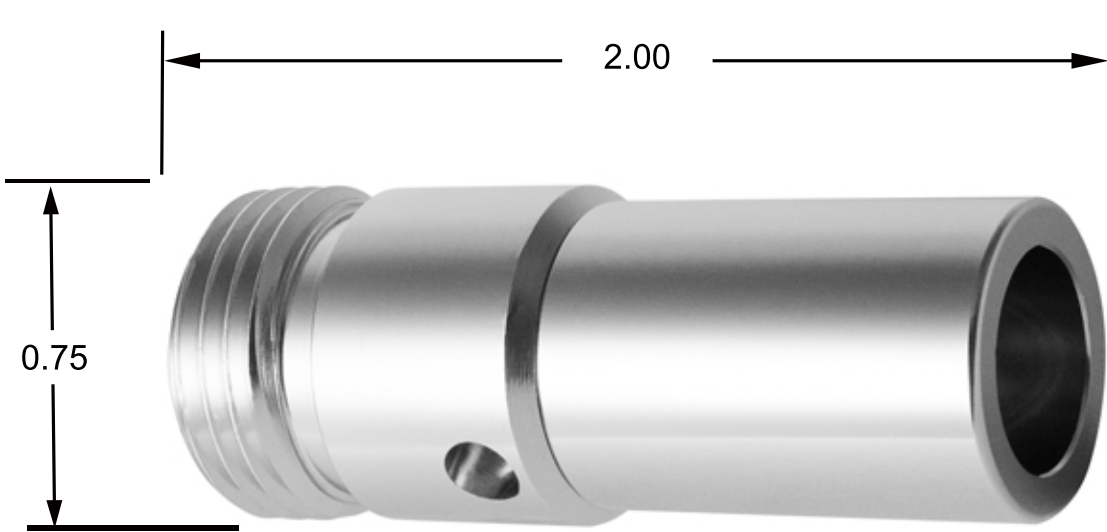


*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body. ② Non-Clogging Silicone Flow Control Diaphragm 1.25 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 1/2"-14 NPS Male. ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs. ⑤ For Use in Acorn and Other Shower Receivers with 1/2" NPS Female Threads. ⑥ Vandal and Ligature Resistant. ⑦ Certifications: A112.18.1, and WaterSense. California Compliant. ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Installation: Use Spanner Wrench with 3/16" pin.

SUBMITTED MODEL NO.
FCS-100-VRM1214-1.5
CHROME FINISH

JOB NAME	ITEM	Retrofits All Acorn and Logan Wizard Models w/ 1/2 - 14 NPS Male Threads
SUBMITTED AS SHOWN		
SUBMITTED AS NOTED		

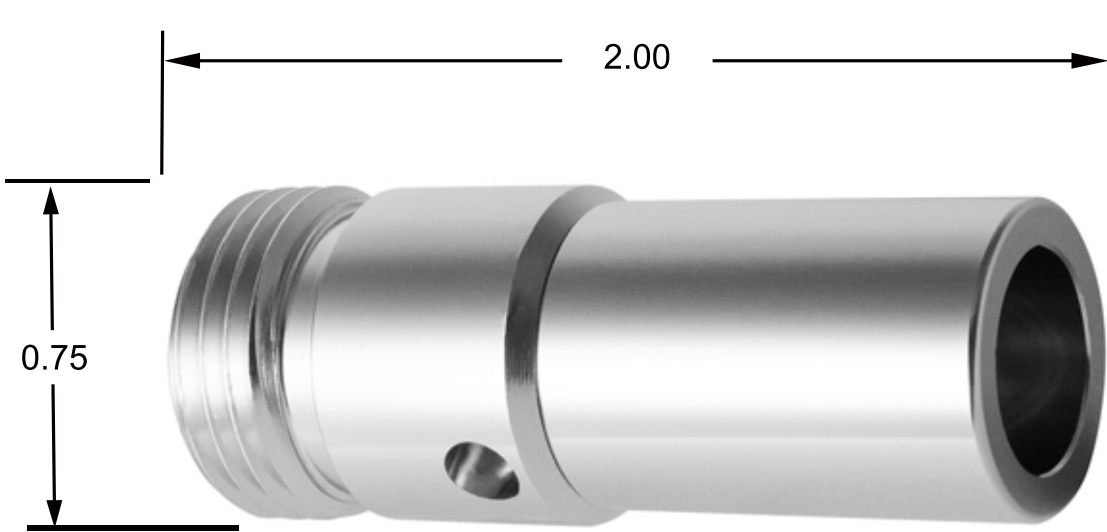


*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body. ② Non-Clogging Silicone Flow Control Diaphragm 1.5 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 1/2"-14 NPS Male. ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs. ⑤ For Use in Acorn and Other Shower Receivers with 1/2" NPS Female Threads. ⑥ Vandal and Ligature Resistant. ⑦ Certifications: A112.18.1, WaterSense, and WaterMark. California Compliant. ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Installation: Use Spanner Wrench with 3/16" pin.

SUBMITTED MODEL NO.
FCS-100-VRM1214-1.8
CHROME FINISH

JOB NAME	ITEM	Retrofits All Acorn and Logan Wizard Models w/ 1/2 - 14 NPS Male Threads
SUBMITTED AS SHOWN		
SUBMITTED AS NOTED		

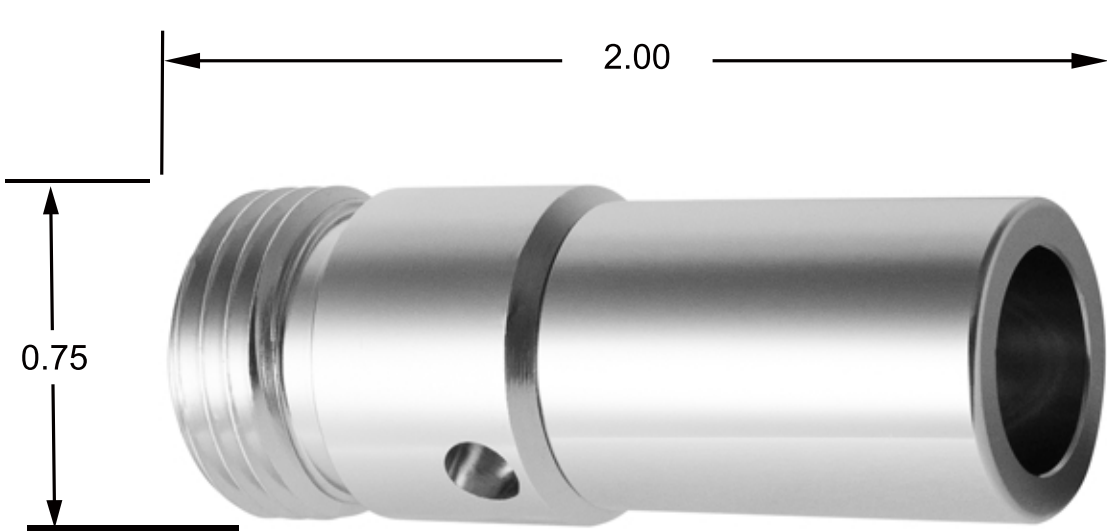


*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body. ② Non-Clogging Silicone Flow Control Diaphragm 1.8 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 1/2"-14 NPS Male. ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs. ⑤ For Use in Acorn and Other Shower Receivers with 1/2" NPS Female Threads. ⑥ Vandal and Ligature Resistant. ⑦ Certifications: A112.18.1, and WaterSense. California Compliant. ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Installation: Use Spanner Wrench with 3/16" pin.

SUBMITTED MODEL NO.
FCS-100-VRM1214-2.0
CHROME FINISH

JOB NAME	ITEM	Retrofits All Acorn and Logan Wizard Models w/ 1/2 - 14 NPS Male Threads
SUBMITTED AS SHOWN		
SUBMITTED AS NOTED		

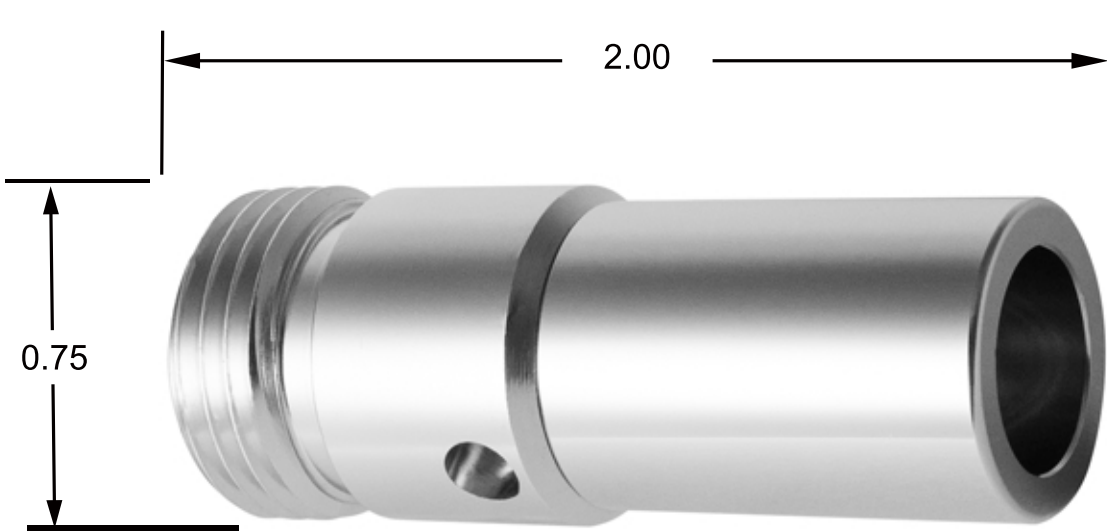

*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body. ② Non-Clogging Silicone Flow Control Diaphragm 2.0 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 1/2"-14 NPS Male. ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs. ⑤ For Use in Acorn and Other Shower Receivers with 1/2" NPS Female Threads. ⑥ Vandal and Ligature Resistant. ⑦ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Installation: Use Spanner Wrench with 3/16" pin.