


SUBMITTED MODEL NO.
FCS-100-VRM131618NS-1.25
CHROME FINISH

JOB NAME	ITEM	Retrofits Chicago 621-CP with 1 3/16 inch-18 UNF Male Threads
----------	------	--

SUBMITTED AS SHOWN	
SUBMITTED AS NOTED	

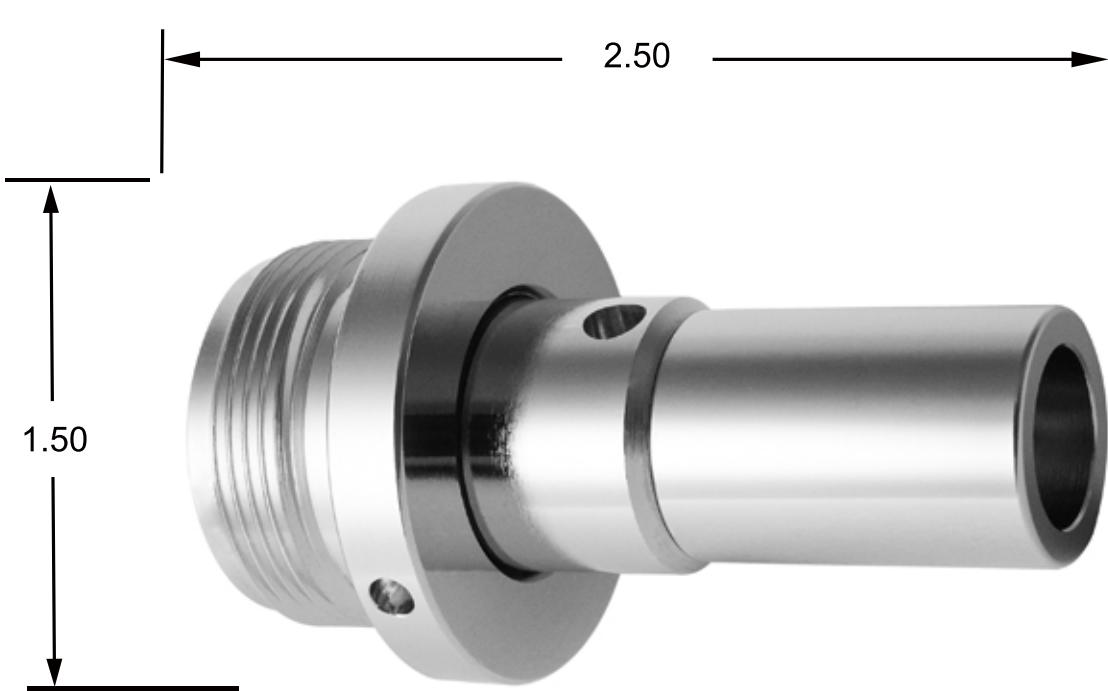


*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body. ② Non-Clogging Silicone Flow Control Diaphragm 1.25 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 1 3/16"-18 UNF Male. ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .40 lbs. ⑤ Retrofits Chicago 621-CP and other receivers with 1 3/16"-18 UNF female Threads. ⑥ Vandal and Ligature Resistant. ⑦ Certifications: A112.18.1, and WaterSense. California Compliant. ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Installation: Use Spanner Wrench with 3/16" pin.

SUBMITTED MODEL NO.
FCS-100-VRM131618NS-1.5
CHROME FINISH

JOB NAME	ITEM	Retrofits Chicago 621-CP with 1 3/16 inch-18 UNF Male Threads
SUBMITTED AS SHOWN		
SUBMITTED AS NOTED		

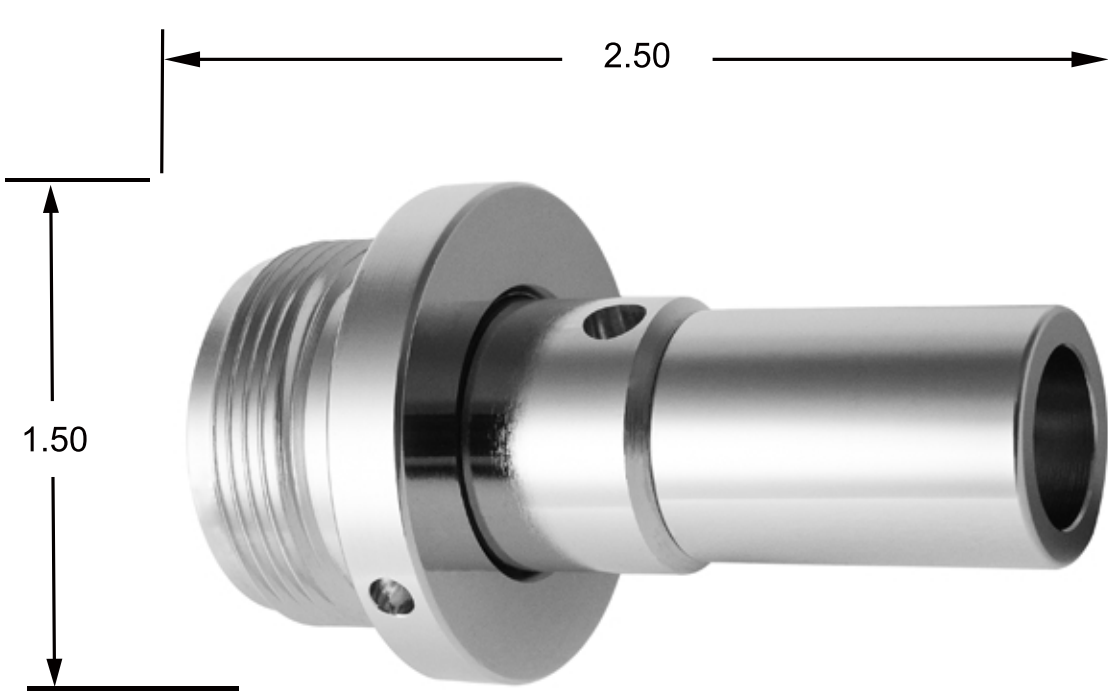


*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body. ② Non-Clogging Silicone Flow Control Diaphragm 1.5 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 1 3/16"-18 UNF Male. ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .40 lbs. ⑤ Retrofits Chicago 621-CP and other receivers with 1 3/16"-18 UNF female Threads. ⑥ Vandal and Ligature Resistant. ⑦ Certifications: A112.18.1, WaterSense, and WaterMark. California Compliant. ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Installation: Use Spanner Wrench with 3/16" pin.

SUBMITTED MODEL NO.
FCS-100-VRM131618NS-1.8
CHROME FINISH

JOB NAME	ITEM	Retrofits Chicago 621-CP with 1 3/16 inch-18 UNF Male Threads
----------	------	--

SUBMITTED AS SHOWN	
SUBMITTED AS NOTED	

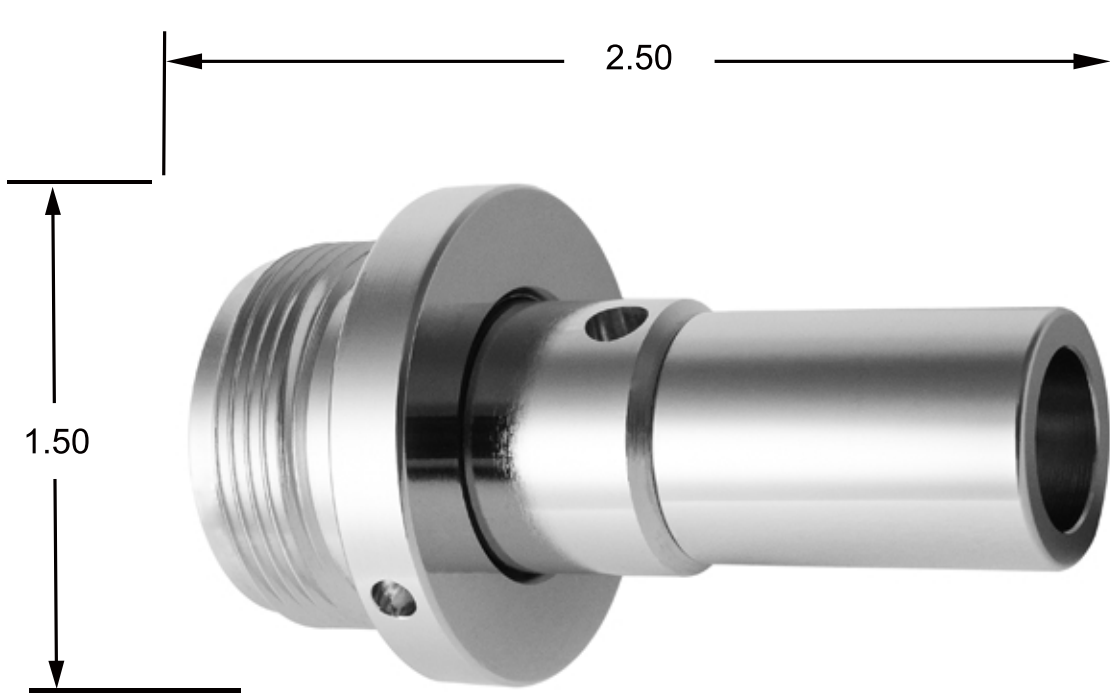


*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body. ② Non-Clogging Silicone Flow Control Diaphragm 1.8 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 1 3/16"-18 UNF Male. ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .40 lbs. ⑤ Retrofits Chicago 621-CP and other receivers with 1 3/16"-18 UNF female Threads. ⑥ Vandal and Ligature Resistant. ⑦ Certifications: A112.18.1, and WaterSense. California Compliant. ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Installation: Use Spanner Wrench with 3/16" pin.

SUBMITTED MODEL NO.
FCS-100-VRM131618NS-2.0
CHROME FINISH

JOB NAME	ITEM
	Retrofits Chicago 621-CP with 1 3/16 inch-18 UNF Male Threads

SUBMITTED AS SHOWN	
SUBMITTED AS NOTED	

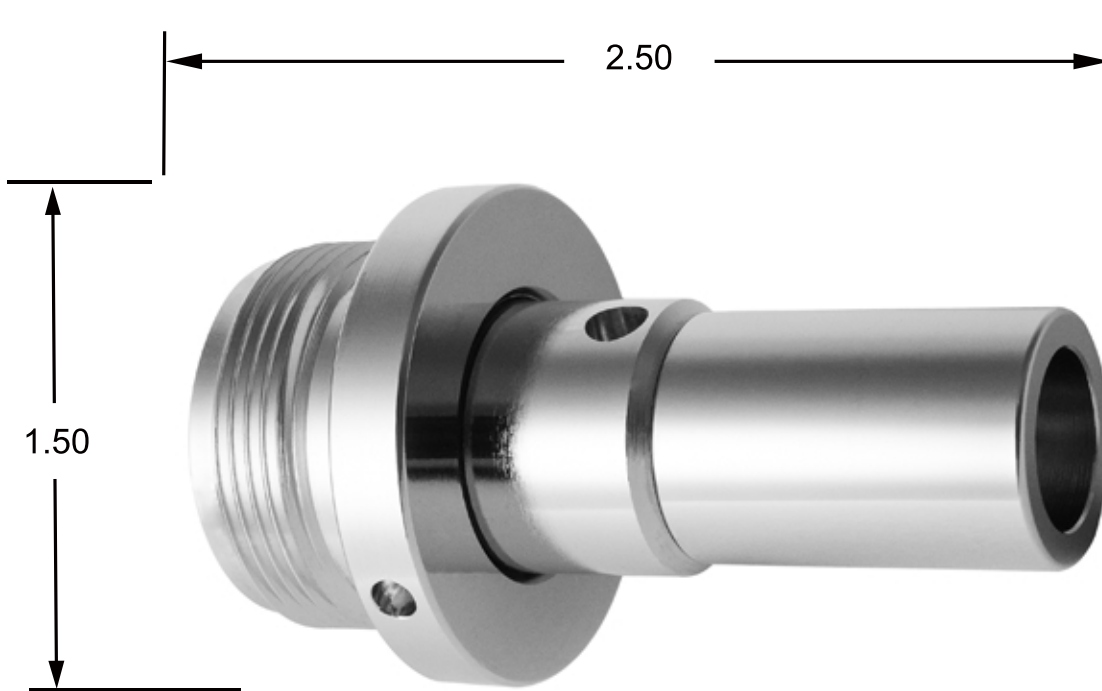

*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body. ② Non-Clogging Silicone Flow Control Diaphragm 2.0 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 1 3/16"-18 UNF Male. ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .40 lbs. ⑤ Retrofits Chicago 621-CP and other receivers with 1 3/16"-18 UNF female Threads. ⑥ Vandal and Ligature Resistant. ⑦ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Installation: Use Spanner Wrench with 3/16" pin.