


SUBMITTED MODEL NO.
FCS-100-VRM91618-1.25
CHROME FINISH

JOB NAME	ITEM	Retrofits Bradley Models with 9/16 inch-18 Male Threads
SUBMITTED AS SHOWN		
SUBMITTED AS NOTED		

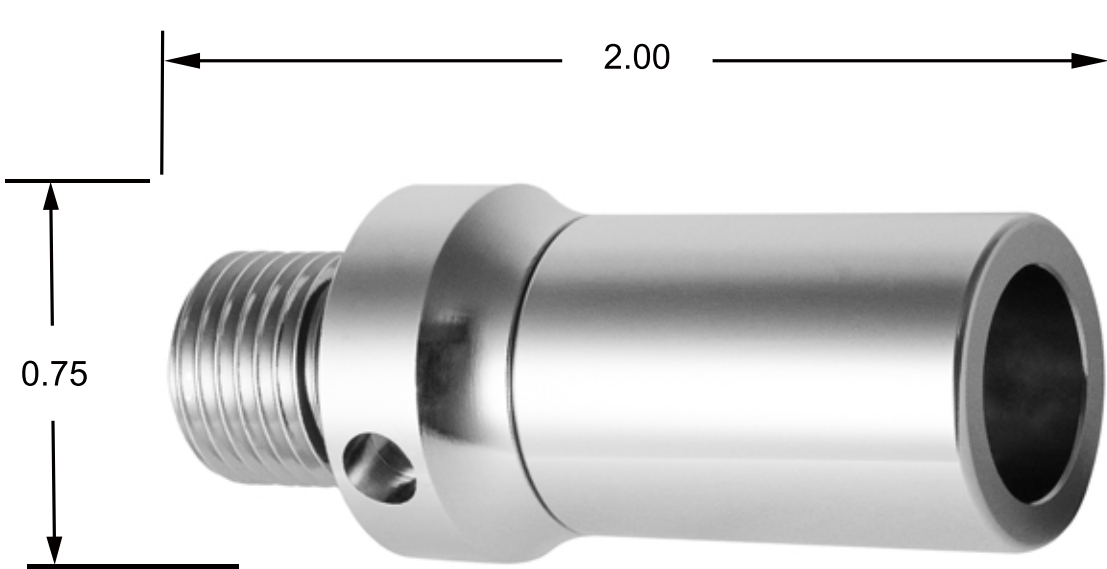

*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body. ② Non-Clogging Silicone Flow Control Diaphragm 1.25 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 9/16"-18 NPS Male. ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs. ⑤ For Use in Bradley Receivers with 9/16-18 Female Threads. ⑥ Vandal and Ligature Resistant. ⑦ Certifications: A112.18.1, and WaterSense. California Compliant. ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Installation: Use Spanner Wrench with 3/16" pin.


JOB NAME

ITEM

Retrofits Bradley Models with
9/16 inch-18 Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

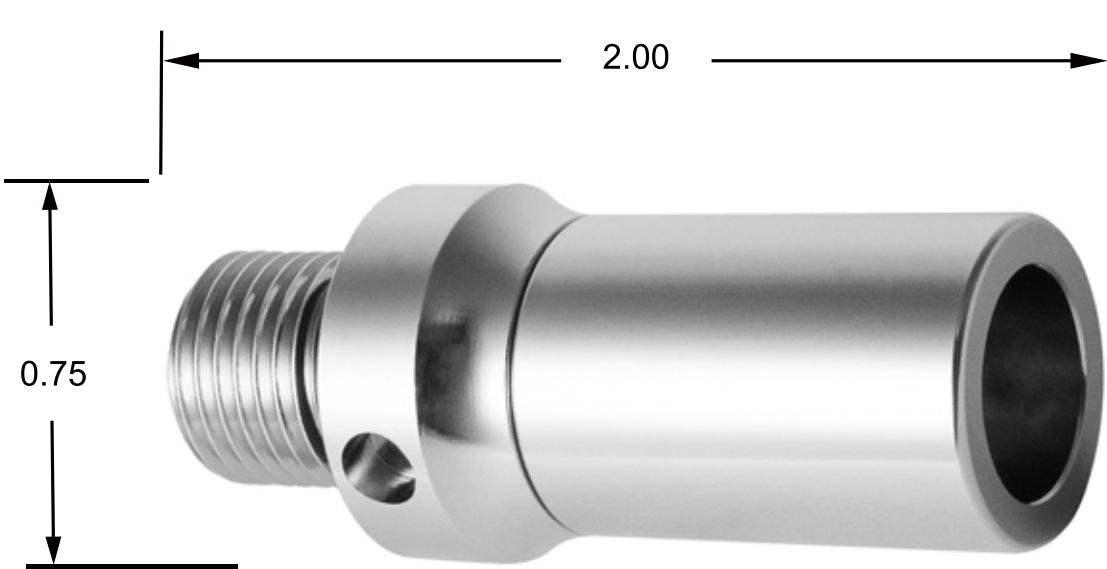

*DIMENSIONS IN INCHES

SPECIFICATIONS


NOTES

- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body.
- ② Non-Clogging Silicone Flow Control Diaphragm 1.5 GPM at 30-80 psi. Pressure Compensating.
- ③ Threads: 9/16"-18 NPS Male.
- ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs.
- ⑤ For Use in Bradley Receivers with 9/16-18 Female Threads.
- ⑥ Vandal and Ligature Resistant.
- ⑦ Certifications: A112.18.1, WaterSense, and WaterMark. California Compliant.
- ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use
Spanner Wrench
with 3/16" pin.

SUBMITTED MODEL NO.
FCS-100-VRM91618-1.8
CHROME FINISH

JOB NAME	ITEM	Retrofits Bradley Models with 9/16 inch-18 Male Threads
SUBMITTED AS SHOWN		
SUBMITTED AS NOTED		

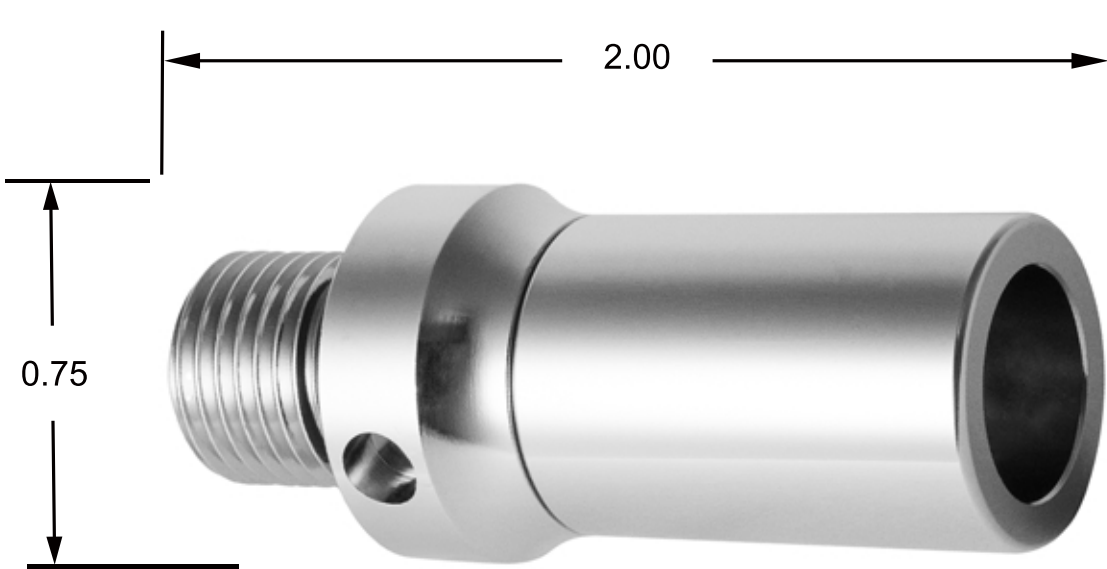


*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. ② Non-Clogging Silicone Flow Control Diaphragm 1.8 GPM at 30-80 psi (Pressure Compensating). ③ Threads: 9/16"-18 NPS Male. ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs. ⑤ For Use in Bradley Receivers with 9/16-18 Female Threads. ⑥ Vandal and Ligature Resistant. ⑦ Certifications: A112.18.1, and WaterSense. ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Installation: Use 3/16" Spanner Wrench.

SUBMITTED MODEL NO.
FCS-100-VRM91618-2.0
CHROME FINISH

JOB NAME	ITEM	Retrofits Bradley Models with 9/16 inch-18 Male Threads
----------	------	---

SUBMITTED AS SHOWN	
SUBMITTED AS NOTED	

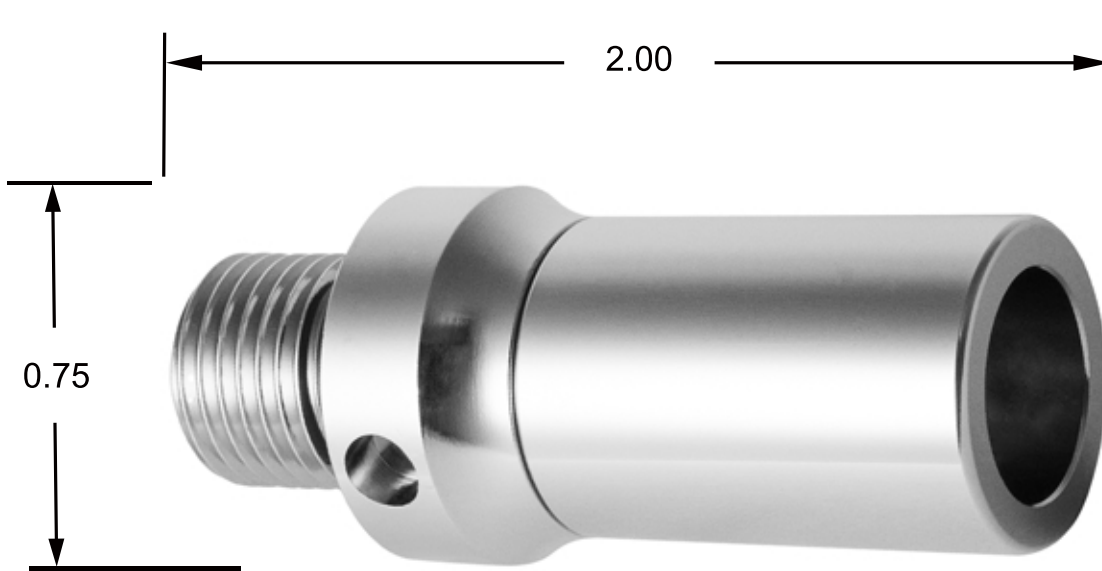

*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body. ② Non-Clogging Silicone Flow Control Diaphragm 2.0 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 9/16"-18 NPS Male. ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .25 lbs. ⑤ For Use in Bradley Receivers with 9/16-18 Female Threads. ⑥ Vandal and Ligature Resistant. ⑦ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Installation: Use Spanner Wrench with 3/16" pin.