


SUBMITTED MODEL NO.
FCS-100-VRMCHATH-1.25
CHROME FINISH

JOB NAME	ITEM	Retrofits Chatham 21SA/31SA with 1.25 inch-20 UNF Male Threads
SUBMITTED AS SHOWN		
SUBMITTED AS NOTED		

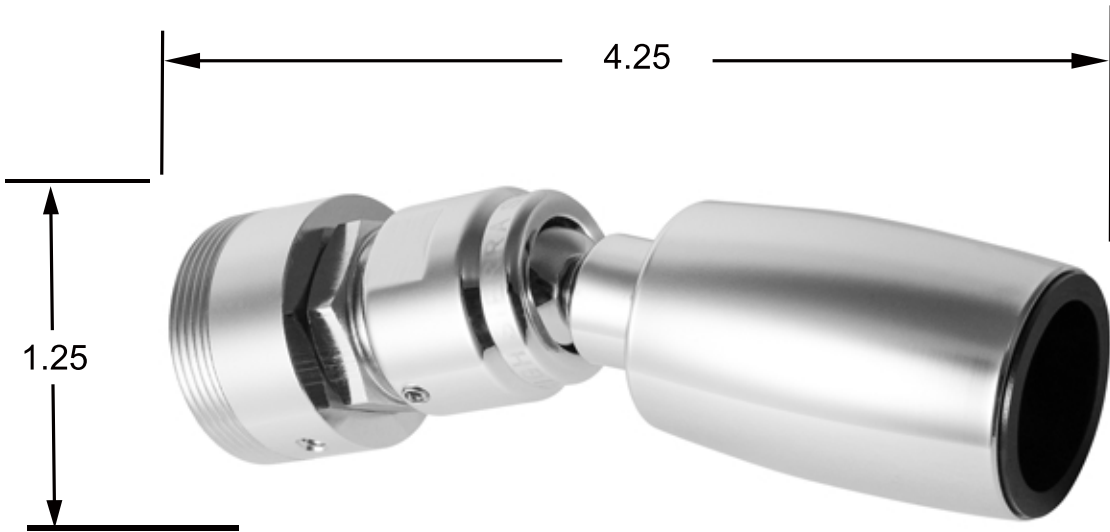

*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel. ② Non-Clogging Silicone Flow Control Diaphragm 1.25 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 1.25"-20 UNF Male. ④ Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .50 lbs. ⑤ Retrofits Chatham 21SA/31SA & Other Receivers Requiring 1.25"-20 UNF Male Threads. ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel. ⑦ Certifications: A112.18.1, and WaterSense. California Compliant. ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Installation: Use Spanner Wrench with 3/16" pin. Includes limescale resistance insert. Insert protects metal from limescale buildup, corrosion, and makes cleaning the shower head easier.

SUBMITTED MODEL NO.

FCS-100-VRMCHATH-1.5

CHROME FINISH


JOB NAME

ITEM

Retrofits Chatham 21SA/31SA
with 1.25 inch-20 UNF Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

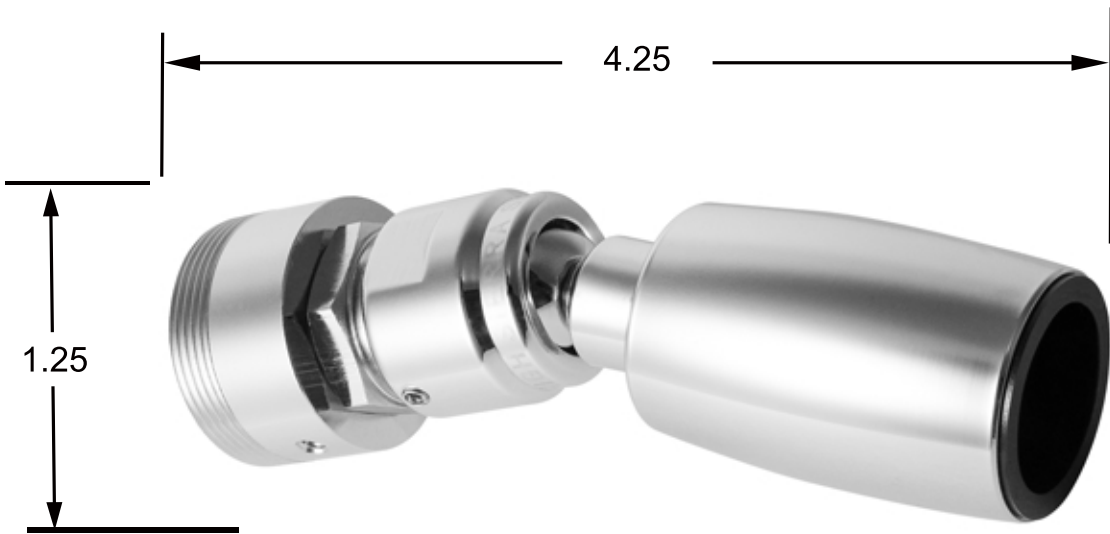

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel.
- ② Non-Clogging Silicone Flow Control Diaphragm 1.5 GPM at 30-80 psi. Pressure Compensating.
- ③ Threads: 1.25"-20 UNF Male.
- ④ Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .50 lbs.
- ⑤ Retrofits Chatham 21SA/31SA & Other Receivers Requiring 1.25"-20 UNF Male Threads.
- ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel.
- ⑦ Certifications: A112.18.1, WaterSense, and WaterMark. California Compliant.
- ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use
Spanner Wrench
with 3/16" pin.

Includes limescale
resistance insert.
Insert protects metal
from limescale
buildup, corrosion,
and makes cleaning
the shower head
easier.

SUBMITTED MODEL NO.

FCS-100-VRMCHATH-1.8

CHROME FINISH


JOB NAME

ITEM

Retrofits Chatham 21SA/31SA
with 1.25 inch-20 UNF Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

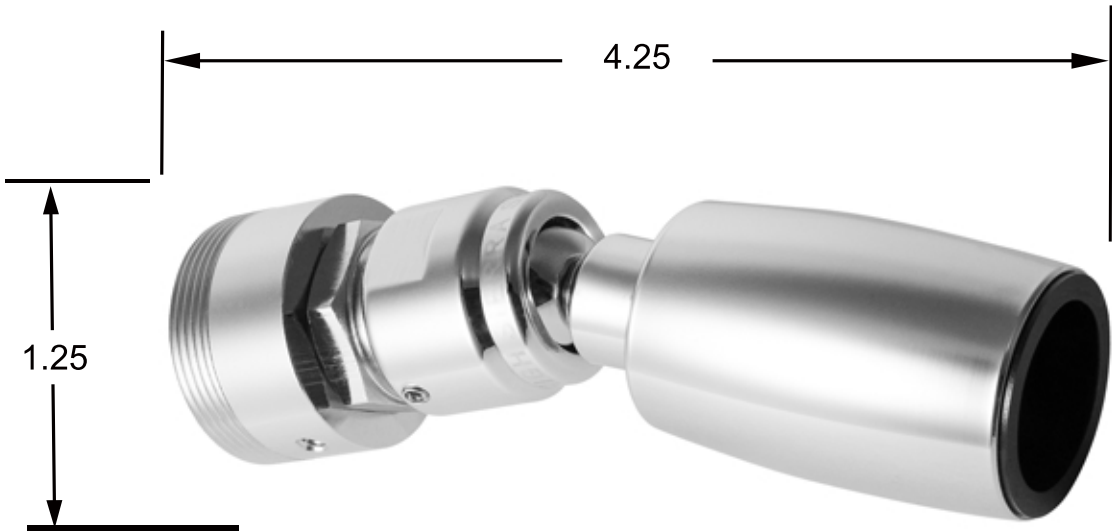

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel.
- ② Non-Clogging Silicone Flow Control Diaphragm 1.8 GPM at 30-80 psi. Pressure Compensating.
- ③ Threads: 1.25"-20 UNF Male.
- ④ Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .50 lbs.
- ⑤ Retrofits Chatham 21SA/31SA & Other Receivers Requiring 1.25"-20 UNF Male Threads.
- ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel.
- ⑦ Certifications: A112.18.1, and WaterSense. California Compliant.
- ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use Spanner Wrench with 3/16" pin.

Includes limescale resistance insert. Insert protects metal from limescale buildup, corrosion, and makes cleaning the shower head easier.


JOB NAME

ITEM

Retrofits Chatham 21SA/31SA
with 1.25 inch-20 UNF Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

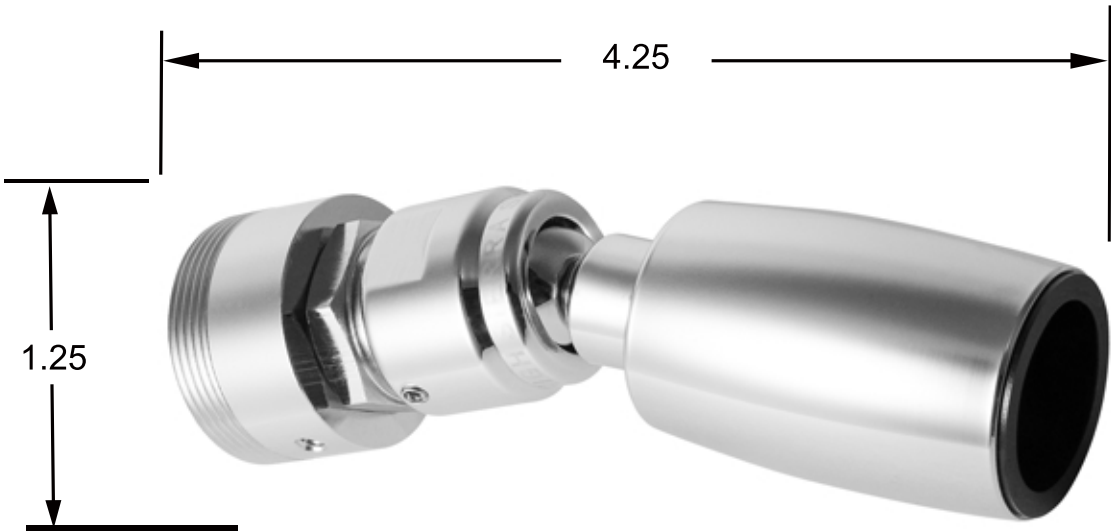

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel.
- ② Non-Clogging Silicone Flow Control Diaphragm 2.0 GPM at 30-80 psi. Pressure Compensating.
- ③ Threads: 1.25"-20 UNF Male.
- ④ Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .50 lbs.
- ⑤ Retrofits Chatham 21SA/31SA & Other Receivers Requiring 1.25"-20 UNF Male Threads.
- ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel.
- ⑦ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use Spanner Wrench with 3/16" pin.

Includes limescale resistance insert. Insert protects metal from limescale buildup, corrosion, and makes cleaning the shower head easier.