


SUBMITTED MODEL NO.
FCS-100-VRMS1214-1.25
CHROME FINISH

JOB NAME	ITEM	Retrofits Acorn & Speakman Wall-Mounted Showerheads w/ 1/2 - 14 NPS Male Threads
SUBMITTED AS SHOWN		
SUBMITTED AS NOTED		

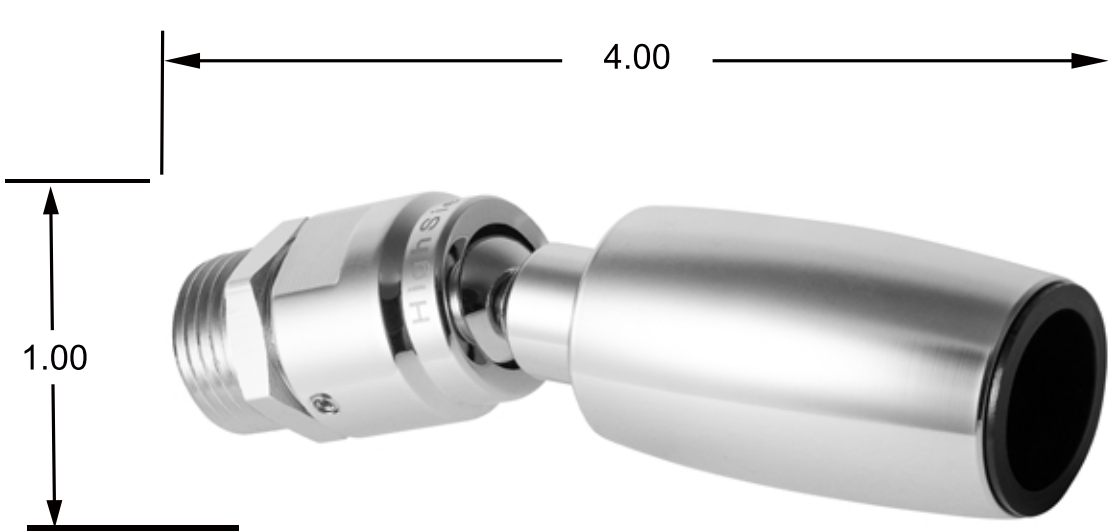


*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel. ② Non-Clogging Silicone Flow Control Diaphragm 1.25 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 1/2"-14 NPS Male. ④ Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .40 lbs. ⑤ Connects to Wall Mounted Receivers with 1/2" NPS Female Threads. ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel. ⑦ Certifications: A112.18.1, and WaterSense. California Compliant. ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Includes limescale resistance insert. Insert protects metal from limescale buildup, corrosion, and makes cleaning the shower head easier.

SUBMITTED MODEL NO.
FCS-100-VRMS1214-1.5
CHROME FINISH

JOB NAME	ITEM	Retrofits Acorn & Speakman Wall-Mounted Showerheads w/ 1/2 - 14 NPS Male Threads
SUBMITTED AS SHOWN		
SUBMITTED AS NOTED		

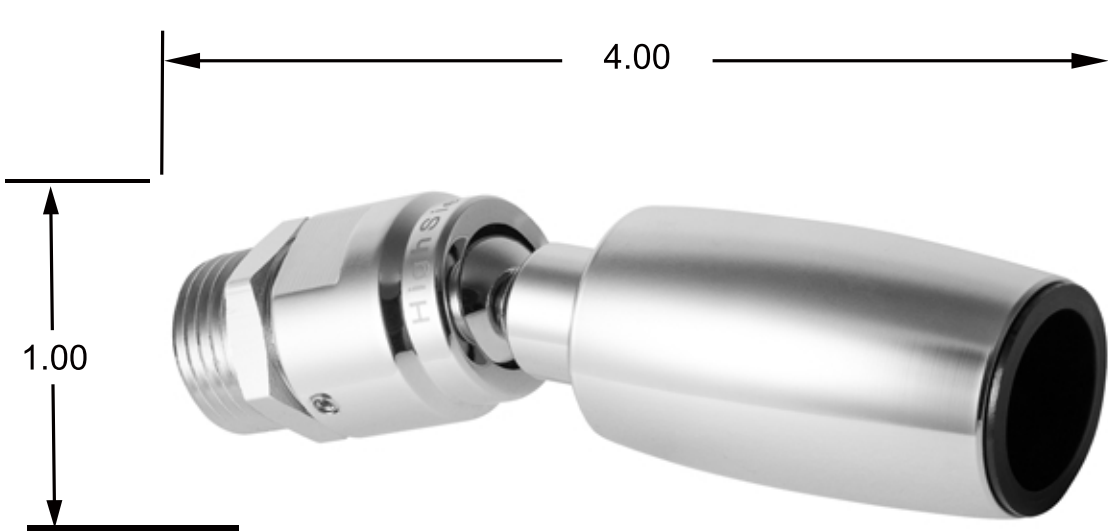


*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel. ② Non-Clogging Silicone Flow Control Diaphragm 1.5 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 1/2"-14 NPS Male. ④ Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .40 lbs. ⑤ Connects to Wall Mounted Receivers with 1/2" NPS Female Threads. ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel. ⑦ Certifications: A112.18.1, WaterSense, and WaterMark. California Compliant. ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Includes limescale resistance insert. Insert protects metal from limescale buildup, corrosion, and makes cleaning the shower head easier.

SUBMITTED MODEL NO.
FCS-100-VRMS1214-1.8
CHROME FINISH

JOB NAME	ITEM	Retrofits Acorn & Speakman Wall-Mounted Showerheads w/ 1/2 - 14 NPS Male Threads
SUBMITTED AS SHOWN		
SUBMITTED AS NOTED		

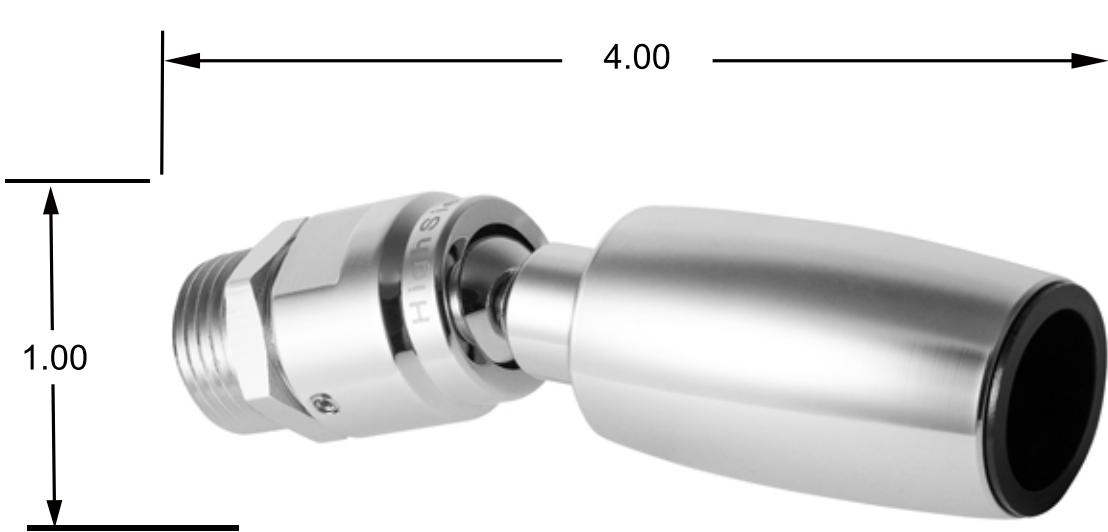


*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel. ② Non-Clogging Silicone Flow Control Diaphragm 1.8 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 1/2"-14 NPS Male. ④ Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .40 lbs. ⑤ Connects to Wall Mounted Receivers with 1/2" NPS Female Threads. ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel. ⑦ Certifications: A112.18.1, and WaterSense. California Compliant. ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Includes limescale resistance insert. Insert protects metal from limescale buildup, corrosion, and makes cleaning the shower head easier.

SUBMITTED MODEL NO.
FCS-100-VRMS1214-2.0
CHROME FINISH

JOB NAME	ITEM	Retrofits Acorn & Speakman Wall-Mounted Showerheads w/ 1/2 - 14 NPS Male Threads
SUBMITTED AS SHOWN		
SUBMITTED AS NOTED		

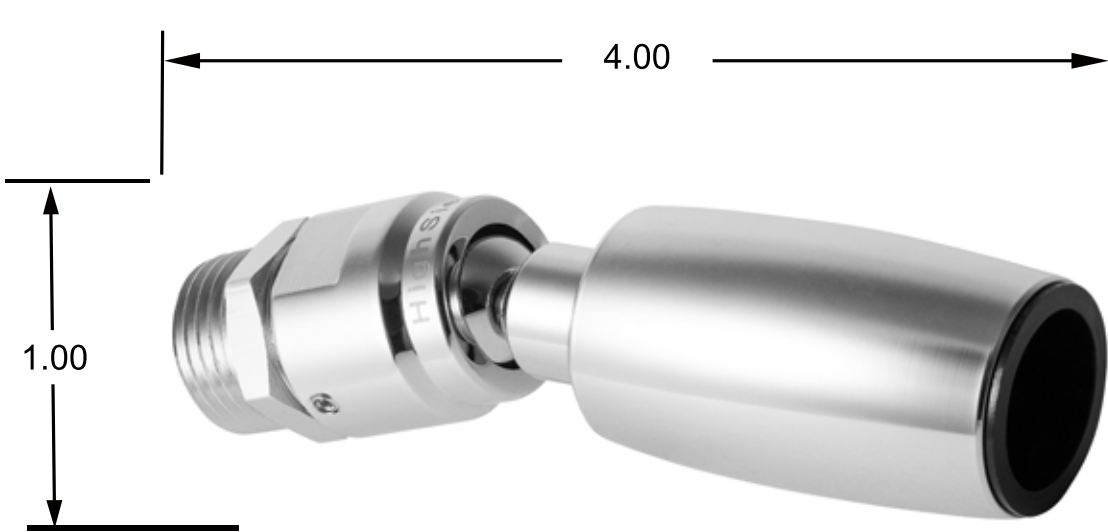

*DIMENSIONS IN INCHES

SPECIFICATIONS	NOTES
① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel. ② Non-Clogging Silicone Flow Control Diaphragm 2.0 GPM at 30-80 psi. Pressure Compensating. ③ Threads: 1/2"-14 NPS Male. ④ Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .40 lbs. ⑤ Connects to Wall Mounted Receivers with 1/2" NPS Female Threads. ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel. ⑦ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.	Includes limescale resistance insert. Insert protects metal from limescale buildup, corrosion, and makes cleaning the shower head easier.