

SUBMITTED MODEL NO.

FCS-100-VRMZURN-1.25

CHROME FINISH


JOB NAME

ITEM

Retrofits Zurn Z7000-12
with 1.25 inch-20 UNF Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

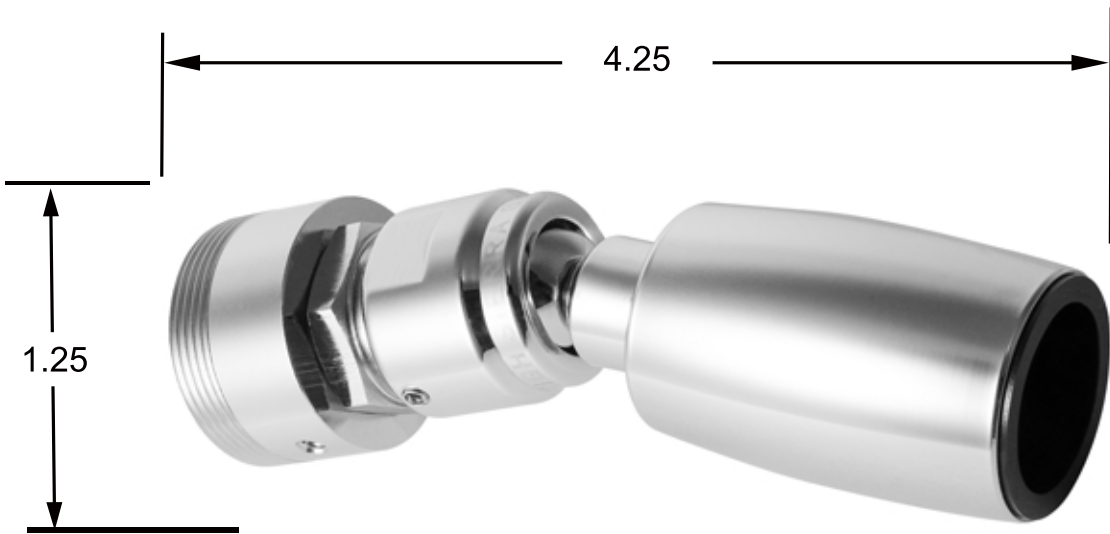

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel.
- ② Non-Clogging Silicone Flow Control Diaphragm 1.25 GPM at 30-80 psi. Pressure Compensating.
- ③ Threads: 1.25"-20 UNF Male.
- ④ Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .50 lbs.
- ⑤ Retrofits Zurn Z7000-12 & Other Wall Receivers With 1.25"-20 UNF Female Threads.
- ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel.
- ⑦ Certifications: A112.18.1, and WaterSense. California Compliant.
- ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use Spanner Wrench with 3/16" pin.

Includes limescale resistance insert. Insert protects metal from limescale buildup, corrosion, and makes cleaning the shower head easier.

SUBMITTED MODEL NO.

FCS-100-VRMZURN-1.5

CHROME FINISH


JOB NAME

ITEM

Retrofits Zurn Z7000-12
with 1.25 inch-20 UNF Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

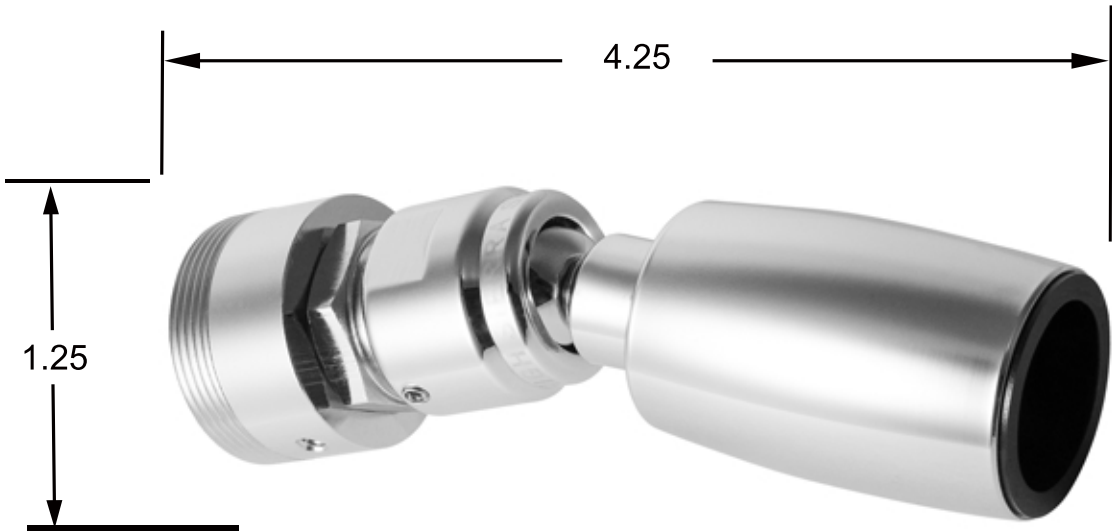

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel.
- ② Non-Clogging Silicone Flow Control Diaphragm 1.5 GPM at 30-80 psi. Pressure Compensating.
- ③ Threads: 1.25"-20 UNF Male.
- ④ Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .50 lbs.
- ⑤ Retrofits Zurn Z7000-12 & Other Wall Receivers With 1.25"-20 UNF Female Threads.
- ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel.
- ⑦ Certifications: A112.18.1, WaterSense, and WaterMark. California Compliant.
- ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use Spanner Wrench with 3/16" pin.

Includes limescale resistance insert. Insert protects metal from limescale buildup, corrosion, and makes cleaning the shower head easier.

SUBMITTED MODEL NO.

FCS-100-VRMZURN-1.8

CHROME FINISH


JOB NAME

ITEM

Retrofits Zurn Z7000-12
with 1.25 inch-20 UNF Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

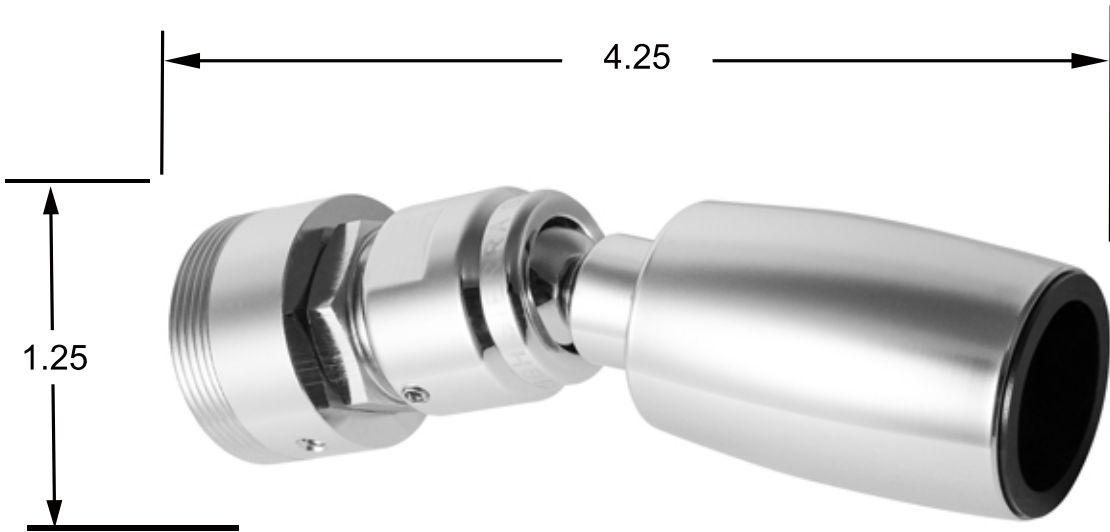

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel.
- ② Non-Clogging Silicone Flow Control Diaphragm 1.8 GPM at 30-80 psi. Pressure Compensating.
- ③ Threads: 1.25"-20 UNF Male.
- ④ Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .50 lbs.
- ⑤ Retrofits Zurn Z7000-12 & Other Wall Receivers With 1.25"-20 UNF Female Threads.
- ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel.
- ⑦ Certifications: A112.18.1, and WaterSense. California Compliant.
- ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use Spanner Wrench with 3/16" pin.

Includes limescale resistance insert. Insert protects metal from limescale buildup, corrosion, and makes cleaning the shower head easier.


JOB NAME

ITEM

Retrofits Zurn Z7000-12
with 1.25 inch-20 UNF Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

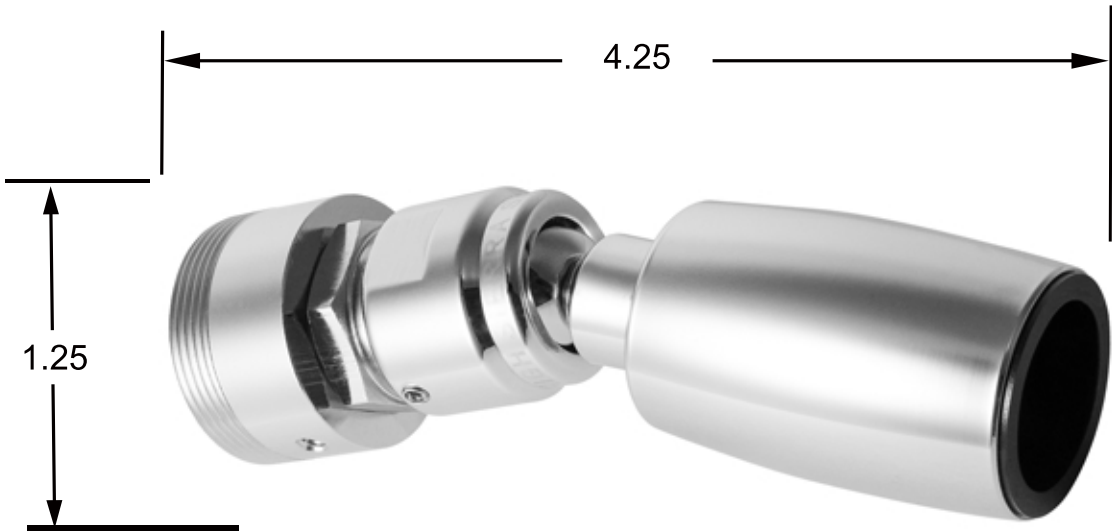

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle with Ball-Joint Swivel.
- ② Non-Clogging Silicone Flow Control Diaphragm 2.0 GPM at 30-80 psi. Pressure Compensating.
- ③ Threads: 1.25"-20 UNF Male.
- ④ Solid Metal Construction; Lead Free Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .50 lbs.
- ⑤ Retrofits Zurn Z7000-12 & Other Wall Receivers With 1.25"-20 UNF Female Threads.
- ⑥ Vandal Resistant Set Screws: 1/16" Hex Stainless Steel.
- ⑦ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use
Spanner Wrench
with 3/16" pin.

Includes limescale
resistance insert.
Insert protects metal
from limescale
buildup, corrosion,
and makes cleaning
the shower head
easier.