


JOB NAME

ITEM

Classic™ Fixed Shower Head  
with Trickle Valve

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

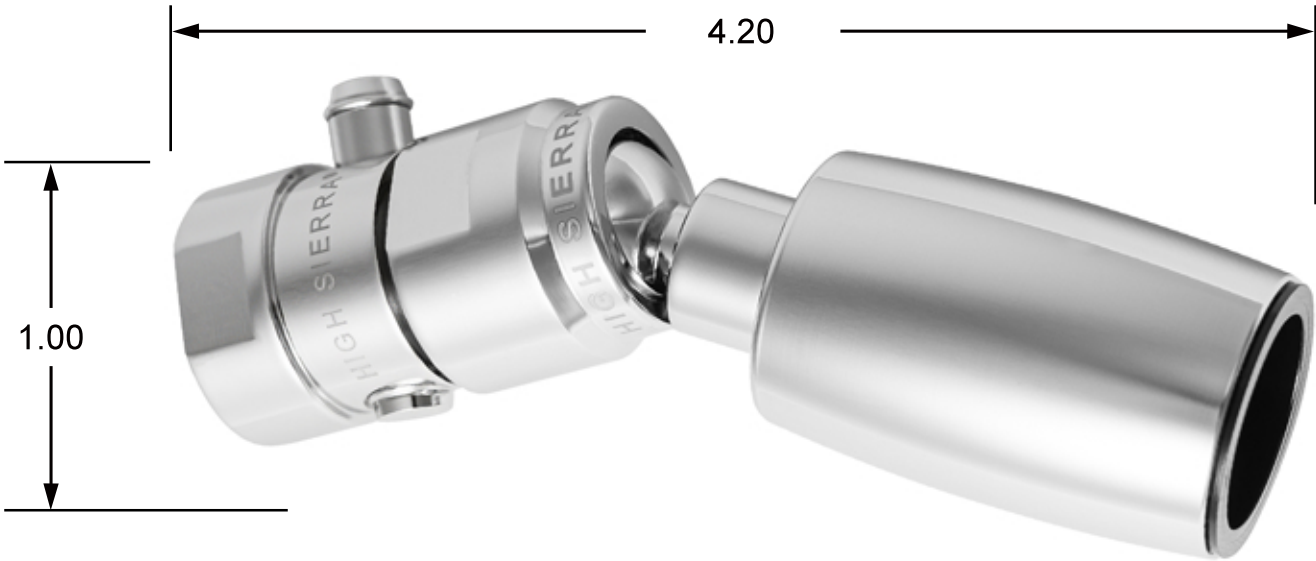

\*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ① FCS™ Patented **STAINLESS STEEL** Single **NON-CLOGGING** Nozzle with Ball-Joint Swivel.
- ② **NON-CLOGGING** Silicone Flow Control Diaphragm 1.25 GPM at 30-80 psi (Pressure Compensating).
- ③ Threads: 1/2"-14NPS Female. Push Button Trickle Valve (Navy Showers).
- ④ Solid Metal Construction; **LEAD-FREE** Brass and **STAINLESS STEEL**. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .43 lbs.
- ⑤ Connects to Shower Arms with 1/2" NPS or NPT Male Threads size.
- ⑥ **CERTIFICATIONS:** A112.18.1, and WaterSense. **CALIFORNIA COMPLIANT.**
- ⑦ Compliant with Buy American Act (**BAA**) and Build America, Buy America (**BABA**). U.S. Patent 7,185,830 B2, D1112615 and Patent Pending.

**SAVES MONEY** up to **50%** less water and the energy to heat it.