


JOB NAME

ITEM

Retrofits Bradley S24-072 with 3/4"-16 Male
Threads & 7/8"-14 Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

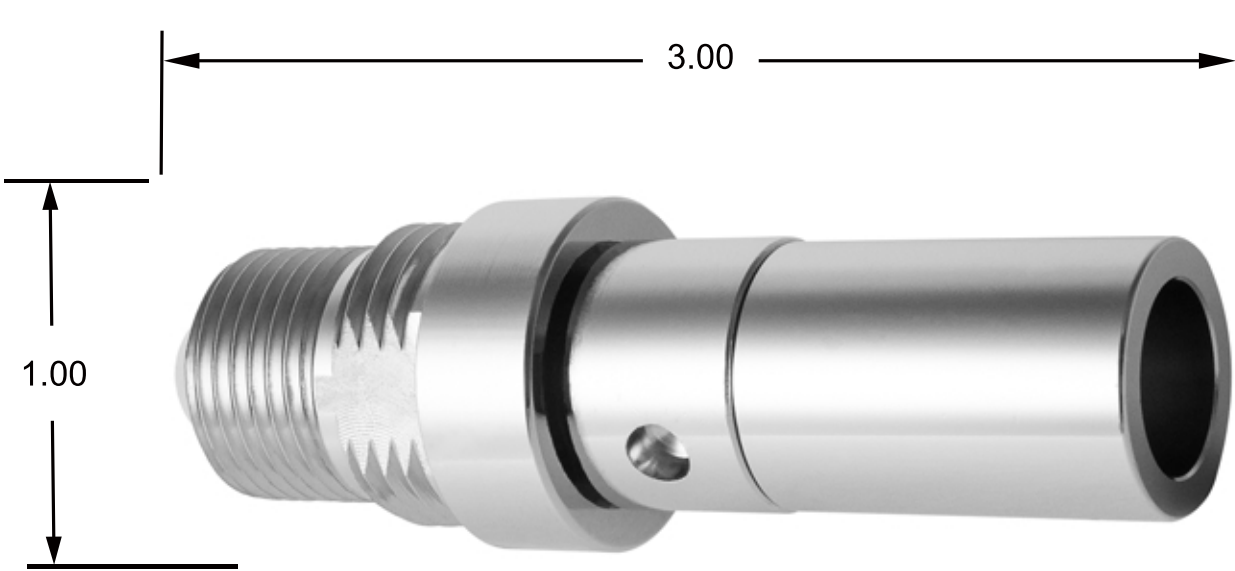

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ①

FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body.
- ②

Non-Clogging Silicone Flow Control Diaphragm 1.25 GPM at 30-80 psi. Pressure Compensating.
- ③

Threads: 3/4"-16 Male and 7/8"-14 Male.
- ④

All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .30 lbs.
- ⑤

Replaces Bradley S24-072.
- ⑥

Vandal and Ligature Resistant.
- ⑦

Certifications: A112.18.1, and WaterSense. California Compliant.
- ⑧

Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use
Spanner Wrench
with 3/16" pin.


JOB NAME

ITEM

Retrofits Bradley S24-072 with 3/4"-16 Male Threads & 7/8"-14 Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

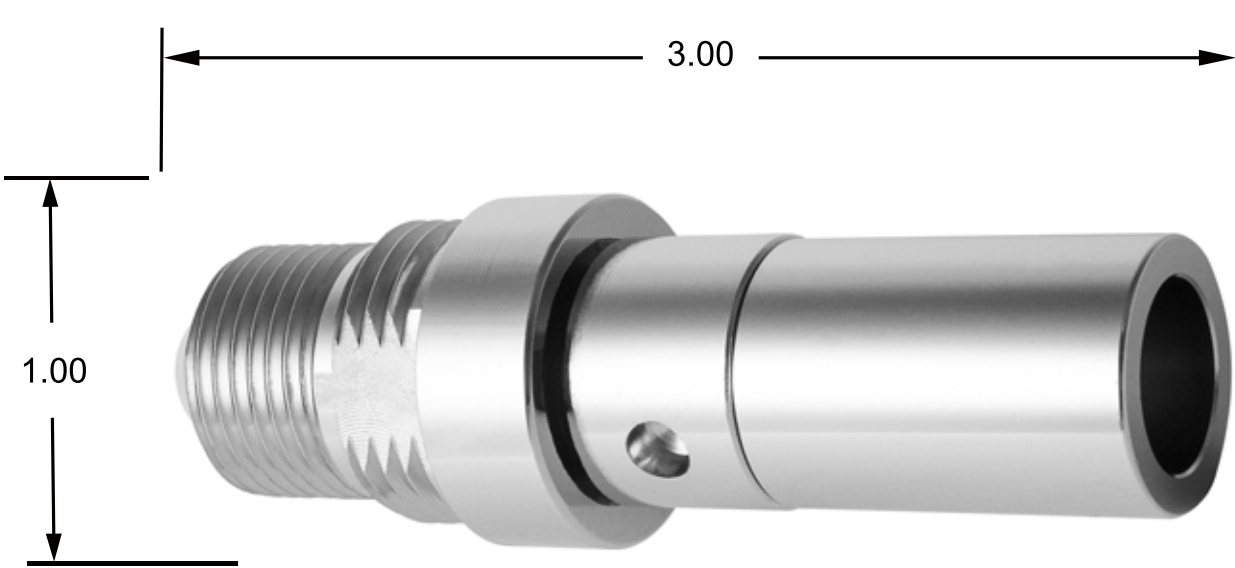

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ① FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body.
- ② Non-Clogging Silicone Flow Control Diaphragm 1.5 GPM at 30-80 psi. Pressure Compensating.
- ③ Threads: 3/4"-16 Male and 7/8"-14 Male.
- ④ All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .30 lbs.
- ⑤ Replaces Bradley S24-072.
- ⑥ Vandal and Ligature Resistant.
- ⑦ Certifications: A112.18.1, WaterSense, and WaterMark. California Compliant.
- ⑧ Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use
Spanner Wrench
with 3/16" pin.


JOB NAME

ITEM

Retrofits Bradley S24-072 with 3/4"-16 Male Threads & 7/8"-14 Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

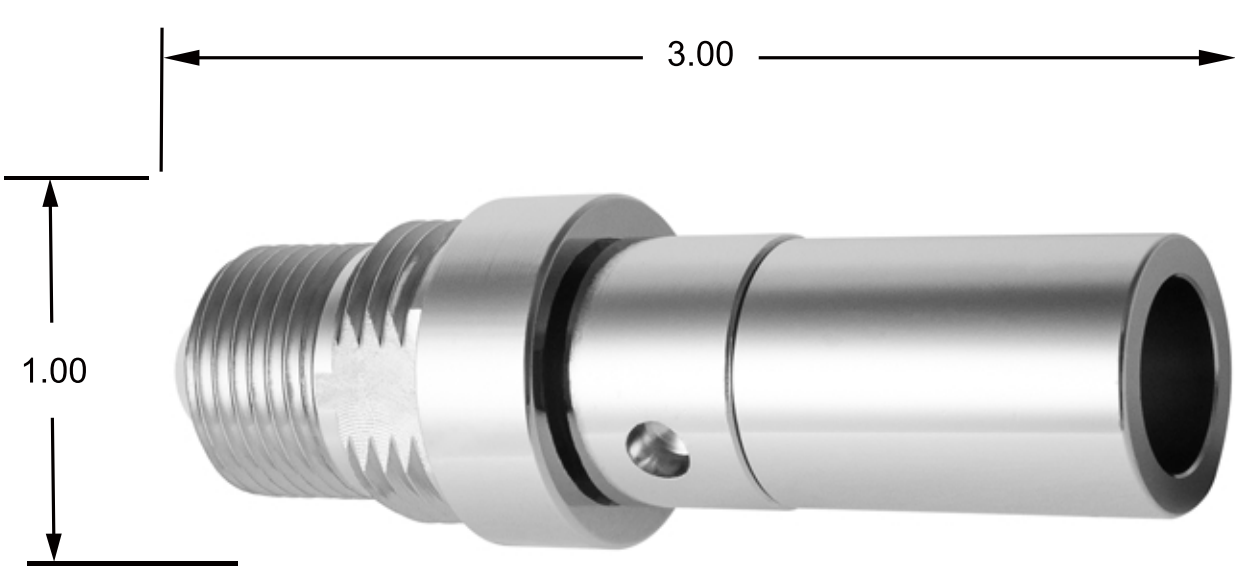

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ①

FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body.
- ②

Non-Clogging Silicone Flow Control Diaphragm 1.8 GPM at 30-80 psi. Pressure Compensating.
- ③

Threads: 3/4"-16 Male and 7/8"-14 Male.
- ④

All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .30 lbs.
- ⑤

Replaces Bradley S24-072.
- ⑥

Vandal and Ligature Resistant.
- ⑦

Certifications: A112.18.1, and WaterSense. California Compliant.
- ⑧

Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use
Spanner Wrench
with 3/16" pin.


JOB NAME

ITEM

Retrofits Bradley S24-072 with 3/4"-16 Male Threads & 7/8"-14 Male Threads

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

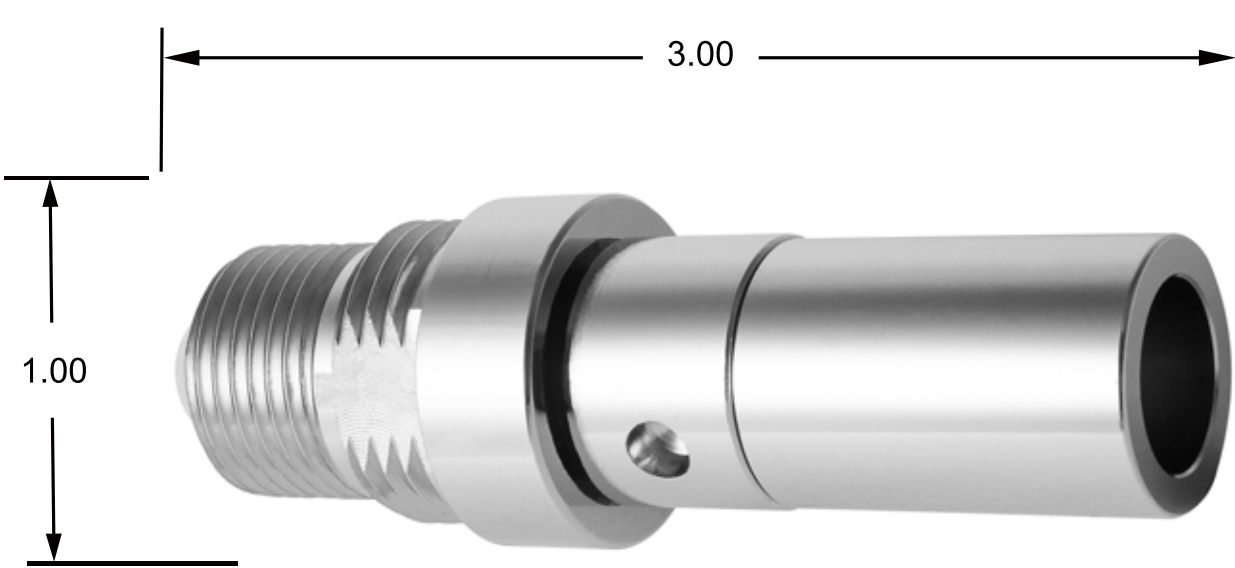

*DIMENSIONS IN INCHES

SPECIFICATIONS

NOTES

- ①

FCS™ Patented Stainless Steel Single Non-Clogging Nozzle. Non-Swivel Body.
- ②

Non-Clogging Silicone Flow Control Diaphragm 2.0GPM at 30-80 psi. Pressure Compensating.
- ③

Threads: 3/4"-16 Male and 7/8"-14 Male.
- ④

All Metal Construction; Brass and Stainless Steel. Fully Drains After Each Use. Naturally Antibacterial. Chrome Plated. Wt: .30 lbs.
- ⑤

Replaces Bradley S24-072.
- ⑥

Vandal and Ligature Resistant.
- ⑦

Compliant with Buy American Act (BAA). U.S. Patent 7,185,830 B2 and Patent Pending.

Installation: Use
Spanner Wrench
with 3/16" pin.